



Decorative Metal Wiring Accessories






Decorative Metal Wiring Accessories in Assorted Plate Finishes

A comprehensive range of decorative metal wiring accessories now available under the single Deco® brand. A brand that is synonymous with high specification, high quality, long life and unprecedented value for money.

Each product is supplied individually packaged in its own distinctive printed box complete with comprehensive fitting instructions.

Deco® switches feature the same modular switch design as our moulded ranges. All of the switch modules featured in our dedicated modules brochure can therefore be used in any combination on Deco® accessories.

Deco® plates are manufactured from stainless steel, georgian style (GCBR) plates are manufactured from cast brass. All Deco® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.



Every Deco® product featured in the pages of this brochure are available in ten distinctive quality finishes.

All Deco® products are available with black or white inserts.

(Excluding antique brass, black nickel & matt black finishes which are supplied with black insert and gasket only).

A selection of Stainless Steel and Satin Chrome finishes are now available with grey inserts.



Antique Brass*
(AB)



Black Nickel
(BN)



Polished Chrome
(CH)



Stainless Steel
(SS)



Satin Brass*
(SB)



Georgian Style
(GCBR)



Pearl Nickel
(PN)



Polished Brass
(BR)



Satin Chrome*
(SC)



Matt Black (Ingot Only)
(MB)

Contents

Switches	D5
Back Boxes	D9
Power Socket Outlets	D14
13A Fused Connection Units	D18
Control Switches	D20
Socket & Blank Plates	D25
Telephone & Data Sockets	D28
TV & Satellite	D29
New Media™ Plates	D30
Galvanised Boxes	D31
Dry Lining Boxes	D32

Plate Style	Product	Product	Insert
	Finish	Number	Colour

Deco® unique product codes

When ordering any Deco® products, please specify the required finish by following the simple code structure as demonstrated here.

For georgian style cast brass, please replace the 'Plate Style' and 'Product Finish' with GCBR eg. GCBR036BK.

Switches

Please see page K18 for a selection of Minigrid® modules.

MINIGRID®

Switches

deco®

D5




011 | 025



012



013

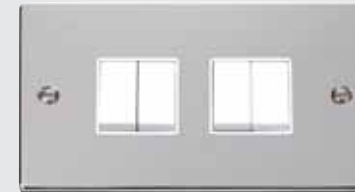

019



105

MINIGRID®

Switch modules interchangeable with MiniGrid® Modules
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

Plates Switches - MiniGrid®

- 011 10AX 1 Gang 2 Way Plate Switch
- 012 10AX 2 Gang 2 Way Plate Switch
- 013 10AX 3 Gang 2 Way Plate Switch
- 019 10AX 4 Gang 2 Way Plate Switch
- 105 10AX 6 Gang 2 Way Plate Switch
- 025 10AX 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1

Back Box Depth (mm): 011 012 013 025: 16 105 019: 25 **Cable Size (mm²):** 4 x 1.5 or 2 x 2.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

click®

sales@scolmore.com | Call: 01827 63454 | scolmore.com

All Deco® switch plates are modular as standard, allowing you to create virtually any switch plate you require. A comprehensive range of available modules is illustrated in the Minigrid® section of this catalogue.

Unfurnished mounting plates can be ordered separately and furnished with whatever selection of switch modules may be required.

All Deco® switches are supplied complete with switch module(s). However the installer may customise a switch arrangement by substituting switch modules by means of a simple, single fixing screw.

411 | 425 412 413

414 416

MINIGRID® Switch modules interchangeable with MiniGrid® Modules
For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

Ingot Plates Switches - MiniGrid®

- 411 10AX Ingot 1 Gang 2 Way Plate Switch
- 412 10AX Ingot 2 Gang 2 Way Plate Switch
- 413 10AX Ingot 3 Gang 2 Way Plate Switch
- 414 10AX Ingot 4 Gang 2 Way Plate Switch
- 416 10AX Ingot 6 Gang 2 Way Plate Switch
- 425 10AX Ingot 1 Gang Intermediate Plate Switch

Standards: BS EN 60669-1
Back Box Depth (mm): 411 412 413 425: 16 414 416: 25
Cable Size (mm²): 4 x 1.5 or 2 x 2.5
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN - Plate Finish** **011 - Product No.** **BK - Insert Colour**
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

401 426

402 404

403 432

471 472

MINIGRID® For the complete range of MiniGrid® modules, see the dedicated MiniGrid® section, page K18.

These plates must be used with the dedicated architrave back boxes WA571 /WA572 and can only be flush mounted.
 See page D31.
 Not compatible with MD070 & MD075 Switch modules.

Unfurnished Plates - MiniGrid®

- 401 1 Gang MiniGrid® Unfurnished Plate - 1 Aperture
 - 402 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures
 - 403 1 Gang MiniGrid® Unfurnished Plate - 3 Apertures
 - 404 2 Gang MiniGrid® Unfurnished Plate - 2 x 2 Apertures
 - 406 2 Gang MiniGrid® Unfurnished Plate - 2 x 3 Apertures
 - 426 2 Gang MiniGrid® Unfurnished Plate - 6 In-Line Apertures
 - 432 2 Gang MiniGrid® Unfurnished Plate - 3 Apertures
- Please note 432 is not available in BN, BR, PN, SB or GCBR.
 See range of MiniGrid® Modules in the MiniGrid® section

Architrave Switch Plates (Unfurnished)

- 471 1 Gang MiniGrid® Unfurnished Architrave Plate - 1 Aperture
- 472 2 Gang MiniGrid® Unfurnished Architrave Plate - 2 Apertures

Standards: BS 5733
Back Box Depth (mm): Dependent On Modules Fitted 471 472: 25
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 471: 35 (W) x 89 (H) x 8 (D) 472: 35 (W) x 149 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN - Plate Finish** **011 - Product No.** **BK - Insert Colour**
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



The furnished plate shown here contains a selection of both single and twin width MiniGrid® modules. GR100 yokes are required to mount the MiniGrid® modules into prior to assembling the frontplate.



512

2 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

512 2 Tier MiniGrid® Unfurnished Plate - 12 Apertures
2 x GR100 Yokes required, see page Dg



518

3 Tier Unfurnished Plates c/w Gaskets - MiniGrid®

518 3 Tier MiniGrid® Unfurnished Plate - 18 Apertures
3 x GR100 Yokes required, see page Dg

MINIGRID®

If dimmer modules are to be mounted directly above each other, the MDg014 (page K37) or similar height dimmer modules must be installed. Alternatively, retractive switch modules MD004 (page K21) can be used in conjunction with Click Smart+ dimming receivers (page A22).

Standards: BS 5733
Back Box Depth (mm): 47
Dimensions (mm): 512: 146 (W) x 146 (H) x 8 (D) 518: 146 (W) x 227 (H) x 8 (D)


Understanding the code:
VP - Plate Style **BN** - Plate Finish **011** - Product No. *Please note:* Supplied with both black & white gaskets (AB, BN & MB supplied with black gaskets only)
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



Example of yoke furnished with modules

MINIGRID®

Galvanised steel back boxes supplied for flush mounting of the large MiniGrid® plates. Mounting Yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

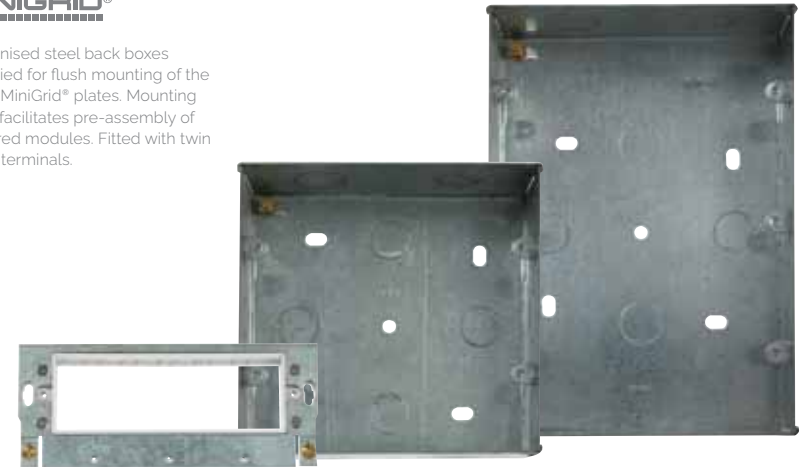

GR100

WA512

WA518

Yokes

- GR100BK** MiniGrid® Module Yoke - 6 Apertures - Black
- GR100PW** MiniGrid® Module Yoke - 6 Apertures - White
- GR100GY** MiniGrid® Module Yoke - 6 Apertures - Grey

2 or 3 yokes are required based on the backbox selected.

Galvanised Steel Back Boxes

- WA512** 2 Tier 47mm Deep K.O. Box
- WA518** 3 Tier 47mm Deep K.O. Box

Standards: 512 518: BS 4662
Dimensions (mm): GR100: 129 (W) x 55 (H) x 14 (D) 512: 137 (W) x 137 (H) x 47 (D) 518: 137 (W) x 197 (H) x 47 (D)



140 | 161



153 | 163



154 | 164



MINIGRID®

Interchangeable modules available on page K37.

We recommend the use of branded halogen lamps with all Deco® leading edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed to use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact Click® Technical support team.

We recommend the use of branded LED lamps with all Deco® trailing edge dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. For further information please contact Click® Technical support team.

Dimmer Switches (Leading Edge)

- 140 1 Gang 2 Way 400Va Dimmer Switch
- 152 2 Gang 2 Way 400Va Dimmer Switch
- 153 3 Gang 2 Way 400Va Dimmer Switch
- 154 4 Gang 2 Way 400Va Dimmer Switch

Dimmer Switches (Trailing Edge)

- 161 1 Gang 2 Way 100W Dimmer Switch
- 162 2 Gang 2 Way 100W Dimmer Switch
- 163 3 Gang 2 Way 100W Dimmer Switch
- 164 4 Gang 2 Way 100W Dimmer Switch

Standards: BS EN 60669-1 BS EN 55015 BS EN 61000-3-2 400Va: BS EN 61000-3-3 100W: BS EN 60669-2-1

Type: 400Va: Leading Edge 100W: Trailing Edge

Back Box Depth (mm): 25 **Cable Size (mm²):** 2 x 1.5

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. Please note: Supplied with both black & white gaskets (AB, BN & MB supplied with black gaskets only)

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Dimmer Modules

- MD9001 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9022 250W 2 Leading Edge Way Dimmer Module (25 x 62mm)
- MD9042 400W 2 Way Leading Edge Dimmer Module (25 x 62mm)
- MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)

Dimmer M10 Nut Runner

- SP900 Dimmer M10 Nut Runner Tool

Use the nut runner to easily exchange dimmer modules and create customised dimmer switch plate



SP900

MD9014



140PL



152PL



153PL



185



186

Dimmer Modules supplied separately

Dimmer Mounting Unfurnished Plates

- 140PL 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- 152PL 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- 153PL 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- 154PL 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures
- 185 1 Gang Dimmer Plate & Knob (1000W Max) - 1 Aperture
- 186 2 Gang Dimmer Plate & Knobs (1630W Max) - 2 Apertures

Standards: BS 5733

Back Box Depth (mm): 25 (35 Flat Plate)

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No. Please note: Supplied with both black & white gaskets (AB, BN & MB supplied with black gaskets only)

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

D12



421



422



MD9125



423



424

MD9125 Intermediate module available.
Satin Chrome & Stainless Steel plate finishes require the use of a Pearl Nickel (PN) Toggle Switch Module.
Not interchangeable with dimmers or other MiniGrid® modules.

Toggle Switches

- 421 10AX 1 Gang 2 Way Toggle Switch
- 422 10AX 2 Gang 2 Way Toggle Switch
- 423 10AX 3 Gang 2 Way Toggle Switch
- 424 10AX 4 Gang 2 Way Toggle Switch

10AX Intermediate Toggle Switch Modules

- MD9125AB Intermediate Toggle Switch Module - Antique Brass
- MD9125BN Intermediate Toggle Switch Module - Black Nickel
- MD9125BR Intermediate Toggle Switch Module - Polished Brass
- MD9125CH Intermediate Toggle Switch Module - Polished Chrome
- MD9125PN Intermediate Toggle Switch Module - Pearl Nickel
- MD9125MB Intermediate Toggle Switch Module - Matt Black

Standards: BS EN 60669-1
Back Box Depth (mm): 25 **Cable Size (mm²):** 4 x 1.5 or 2 x 2.5
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code:
VP - Plate Style BN - Plate Finish 011 - Product No. Please note: Supplied with both black & white gaskets (AB, BN & MB supplied with black gaskets only)
AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



With the ever increasing demand for power supplies in all areas of the home comes the problem of selecting and fitting outlets which blend harmoniously with the décor of the room in which they are to be fitted.

The 10 different Deco® plate finishes offer a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...




771U

770

Switched Sockets With USB Outlet

- 771U** 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- 770** 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)

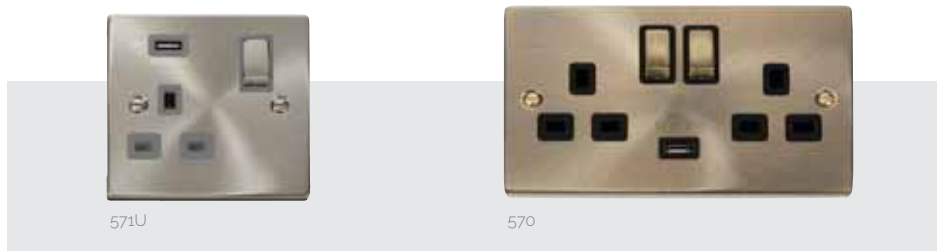

571U

570

Ingot Switched Sockets With USB Outlet

- 571U** 13A Ingot 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- 570** 13A Ingot 2 Gang Switched Sockets With 2.1A USB Outlet (Twin Earth)

Standards: BS 1363-2:2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.



780

786

Switched Sockets With Twin USB Outlets

- 780** 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
- 786** 13A 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)



580

586

Ingot Switched Sockets With Twin USB Outlets

- 580** 13A Ingot 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)
- 586** 13A Ingot 2 Gang Switched Safety Shutter Socket Outlet With Type A & C USB (4.2A) Outlets (Twin Earth)

Standards: BS 1363-2:2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1
Back Box Depth (mm): 25 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



035

036

Switched Socket Outlets

- 035 13A 1 Gang DP Switched Socket
- 036 13A 2 Gang DP Switched Socket (Twin Earth)



535

536

Ingot Switched Socket Outlets

- 535 13A Ingot 1 Gang DP Switched Socket
- 536 13A Ingot 2 Gang DP Switched Socket (Twin Earth)

Standards: BS 1363-2
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

Safety Shutter Sockets (Excluding USB options) are only available for sale in the Republic of Ireland.



038

039

1836

Round Pin Socket Outlets

- 038 5A Round Pin Socket
- 039 2A Round Pin Socket

Ingot Switched Safety Shutter Socket Outlets With Outboard Rockers

- 1836 13A Ingot 2 Gang DP 3 Pin Safety Shutter Switched Socket Outlet (Twin Earth)



1535

1536

Ingot Switched Safety Shutter Socket Outlets

- 1535 13A Ingot 1 Gang DP 3 Pin Safety Shutter Switched Socket Outlet
- 1536 13A Ingot 2 Gang DP 3 Pin Safety Shutter Switched Socket Outlet (Twin Earth)

Standards: BS 1363-2 038 039: BS 546
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4 038: 3 x 1.5 039: 4 x 1.5 or 3 x 2.5
 Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



Fused Connection Units With Optional Flex Outlet

- 050 13A Fused Connection Unit
- 051 13A DP Switched Fused Connection Unit
- 052 13A DP Switched Fused Connection Unit With Neon
- 053 13A Fused Connection Unit With Neon



Fused Connection Units Without Flex Outlet

- 650 13A Fused Connection Unit
- 651 13A DP Switched Fused Connection Unit
- 652 13A DP Switched Fused Connection Unit With Neon
- 653 13A Fused Connection Unit With Neon

Standards: BS 1363-4 BS 1362
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



Ingot Fused Connection Units With Optional Flex Outlet

- 550 13A Ingot Fused Connection Unit
- 551 13A Ingot DP Switched Fused Connection Unit
- 552 13A Ingot DP Switched Fused Connection Unit With Neon
- 553 13A Ingot Fused Connection Unit With Neon



Ingot Fused Connection Units Without Flex Outlet

- 750 13A Ingot Fused Connection Unit
- 751 13A Ingot DP Switched Fused Connection Unit
- 752 13A Ingot DP Switched Fused Connection Unit With Neon
- 753 13A Ingot Fused Connection Unit With Neon

Standards: BS 1362
 Back Box Depth (mm): 25 Cable Size (mm²): 3 x 2.5 or 2 x 4
 Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

3 Pole And 20A DP Switches Are Non-Modular.



022



023

20A Control Switches With Optional Flex Outlet

- 022 20A DP Switch
- 023 20A DP Switch With Neon



622



623

20A Control Switches Without Flex Outlet

- 622 20A DP Switch
- 623 20A DP Switch With Neon



020

Fan Isolation Switch

- 020 10A 3 Pole Fan Isolation Switch


Standards: BS EN 60669-1 020: BS EN 60669-2-4
 Back Box Depth (mm): 25 020: 16 Cable Size (mm²): 3 x 2.5 020: 4 x 1.5 or 2 x 2.5
 Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

3 Pole And 20A DP Switches Are Non-Modular.



522



523

Ingot 20A Control Switches With Optional Flex Outlet

- 522 20A Ingot DP Switch
- 523 20A Ingot DP Switch With Neon



722



723

Ingot 20A Control Switches Without Flex Outlet

- 722 20A Ingot DP Switch
- 723 20A Ingot DP Switch With Neon



520

Ingot Fan Isolation Switch

- 520 10A Ingot 3 Pole Fan Isolation Plate Switch

Standards: BS EN 60669-1 520: BS EN 60669-2-4
 Back Box Depth (mm): 25 520: 16 Cable Size (mm²): 3 x 2.5 520: 4 x 1.5 or 2 x 2.5
 Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style BN - Plate Finish 011 - Product No. BK - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.




200 201 204
202 203 205

45A Switches And Socket Outlets

- 200 45A 1 Gang DP Switch
- 201 45A 1 Gang DP Switch With Neon
- 202 45A 2 Gang DP Switch
- 203 45A 2 Gang DP Switch With Neon
- 204 45A 2 Gang DP Switch With 13A DP Switched Socket
- 205 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 204 205: BS 4177
Back Box Depth (mm): 35 **Cable Size (mm²):** 1 x 16
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 202 203: 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
 AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome,
 BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.

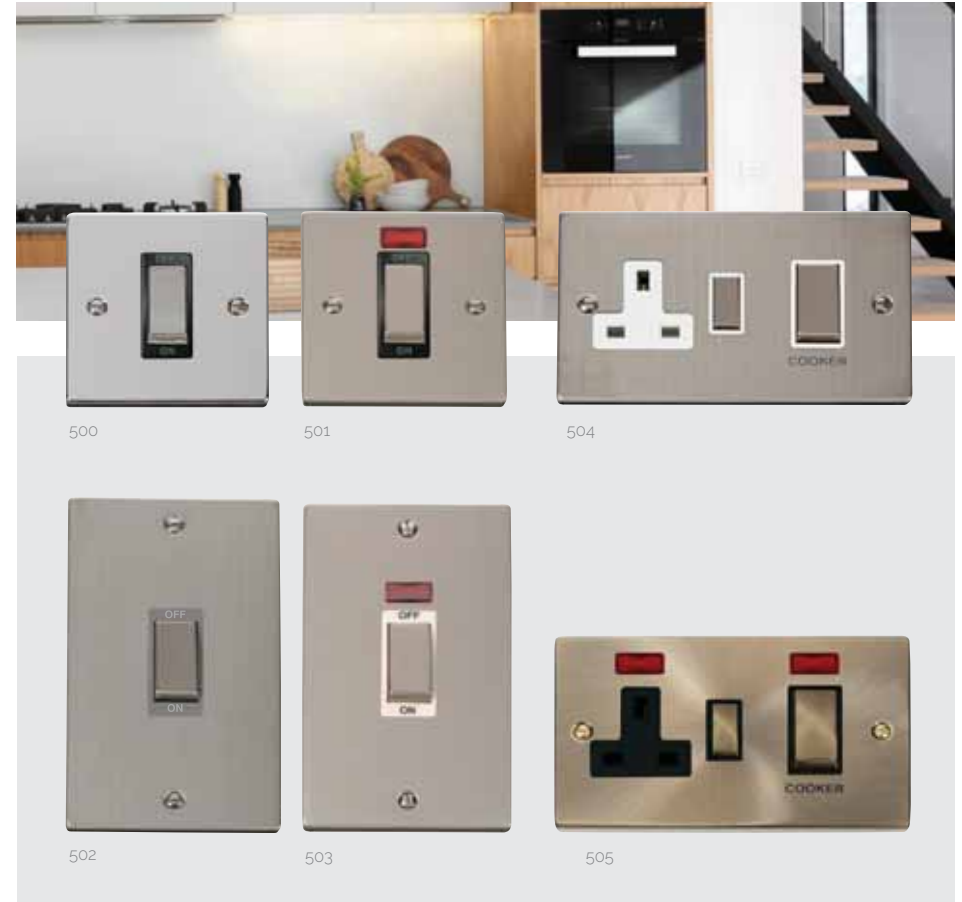

500 501 504
502 503 505

Ingot 45A Switches And Socket Outlets

- 500 45A Ingot 1 Gang DP Switch
- 501 45A Ingot 1 Gang DP Switch With Neon
- 502 45A Ingot 2 Gang DP Switch
- 503 45A Ingot 2 Gang DP Switch With Neon
- 504 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket
- 505 45A Ingot 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS EN 60669-1 504 505: BS 4177
Back Box Depth (mm): 35 **Cable Size (mm²):** 1 x 16
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 502 503: 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
 VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
 AB Antique Brass, CH Polished Chrome, SC Satin Chrome, BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, MB Matt Black (Ingot Only).



660

Lockable Switches

660 20A Double Pole Key Lockable Switch



655

Ingot Lockable Sockets

655 13A Ingot 1 Gang DP Key Lockable Socket With Neon



675

Lockable Sockets

675 13A 1 Gang DP Key Lockable Socket With Neon

Two keys provided (Spare keys available: SP660).



024

20A DP Sink/Bath Switch

024 20A DP Sink/Bath Switch With Neon



100

Dual Voltage Shaver Socket

100 115/230V Dual Voltage Shaver Socket

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.



060

Blank Plates

060 1 Gang Blank Plate

061 2 Gang Blank Plate



061

Standards: 655 675: BS EN 60669-1 BS 1363-2 660: BS EN 60669-1
Back Box Depth (mm): 35 **Cable Size (mm²):** 3 x 2.5 or 2 x 4
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.

Standards: 024: BS EN 60669-1 100: BS EN IEC 61558-1 BS EN 61558-2-5
Back Box Depth (mm): 024: 25 100: 47 **Cable Size (mm²):** 024: 3 x 2.5 100: 2 x 1.5 or 1 x 2.5
Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 100: 88 (W) x 146 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only),
BN Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



TV, Telephone & Data Sockets

The following pages contain details of Deco® products designed to deal with handling data and media transfer through telephone, computer, TV or radio.

As well as the finished products please also find details of unfurnished mounting plates designed to accept custom selections of New Media™ modules from the New Media™ section of this catalogue.



RJ11 Telephone Outlets

115 Single RJ11 (Irish/US) Outlet

Telephone Outlets

120 Single Telephone Outlet - Master

121 Twin Telephone Outlet - Master

125 Single Telephone Outlet - Secondary

126 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth (mm): 16 115: 35
Termination Type: IDC 115: Screw
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



065 | 158

066 | 159

156

157 | 170



Non-isolated Coaxial Outlets (Unshielded)

065 Single Coaxial Outlet
 066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

158 Single Isolated Coaxial Outlet
 159 Twin Isolated Coaxial Outlet

Satellite Outlets (Unshielded)

156 Non-isolated Single Satellite Outlet
 157 Isolated Satellite & Isolated Coaxial Outlet
 170 Non-isolated Satellite & Non-isolated Coaxial Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth (mm): 16
Dimensions (mm): 88 (W) x 88 (H) x 8 (D)

Understanding the code: Please note: AB, BN & MB are only available with Black inserts. SC & SS Ingot are available with Grey Inserts
VP - Plate Style **BN** - Plate Finish **011** - Product No. **BK** - Insert Colour
AB Antique Brass, **BR** Polished Brass, **SB** Satin Brass, **CH** Polished Chrome, **SC** Satin Chrome, **MB** Matt Black (Ingot Only), **BN** Black Nickel, **SS** Stainless Steel, **PN** Pearl Nickel, **GCBR** Georgian Style.



MP603

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

Half New Media Semi-Modular Part Furnished Plate

MP603 Half New Media Part Furnished Front Plate - 2 X 13A DP Switched Sockets & 3 Apertures

Available in Chrome (CH), Satin Chrome (SC) Satin Brass (SB) and Polar White (PW). Requires MP520 flush back box.

2 Tier Semi-Modular Unfurnished Plates

MP606 Large New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Sockets & 2 x 3 Apertures

Available in Chrome (CH), Satin Chrome (SC) and Polar White (PW). / MP525 or MP535 flush back box.




MP606



310



311

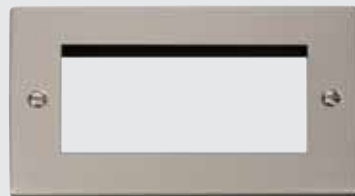

312



See our dedicated New Media™ section for more information on the range of New Media™ modules available. For the complete range of Semi-modular unfurnished plates see page L7.

Unfurnished Plates - New Media™

- 310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- 311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- 312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Standards: BS 5733 603 606; BS 1363-2

Back Box Depth (mm): Dependent On Modules Fitted **Color Size (mm²):** 603 606: 3 x 2.5 or 2 x 4

Dimensions (mm): 1 Gang: 88 (W) x 88 (H) x 8 (D) 2 Gang: 146 (W) x 88 (H) x 8 (D) 603: 250 (W) x 86 (H) x 8 (D) 606: 250 (W) x 216 (H) x 8 (D)

Understanding the code:

VP - Plate Style **BN** - Plate Finish **011** - Product No.

AB Antique Brass, BR Polished Brass, SB Satin Brass, CH Polished Chrome, SC Satin Chrome, MB Matt Black (Ingot Only),

BN Black Nickel, SS Stainless Steel, PN Pearl Nickel, GCBR Georgian Style.



WA093

WA095

WA370

WA571

WA572

SP650

SP675

Galvanised Steel Back Boxes

WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box

WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box

WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box

WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box

WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box

WA370 1 + 1 35mm Deep Dual Accessory Box (Deco® Range Only)

WA375 1 + 2 35mm Deep Dual Accessory Box (Deco® Range Only)

WA571 1 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

WA572 2 Gang 25mm Deep Architrave Galvanised Steel K.O. Box (Deco® Range Only)

Longer Fixing Screws

SP650 Standard M3.5 Dia. 50mm Long Screws (Bag 100)

SP675 Standard M3.5 Dia. 75mm Long Screws (Bag 100)

SP625 Standard M3.5 Security Screw 25mm Long (Bag 100) Require 2mm security allen key/driver.

essentials™

For the complete range of back boxes see Essentials™ page N7.

For the complete range of longer fixing screws see Essentials™ page N9.

Understanding the code:

Screws available in BR Brass, CH Chrome, MB Matt Black and BN Black Nickel finishes.

Suffix code with preferred finish. Chrome finish may be used with white plate accessories



WA4247

WA106P

WA107P

FlameGuard® Dry Lining Boxes

- WA4135 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box

Dry Lining Boxes (Sprung Fixing Lugs)

- WA087SF 1 Gang 35mm Deep Dry Lining Box
- WA088SF 2 Gang 35mm Deep Dry Lining Box
- WA106SF 1 Gang 47mm Deep Dry Lining Box
- WA107SF 2 Gang 47mm Deep Dry Lining Box

Dry Lining Boxes

- WA087P 1 Gang 35mm Deep Dry Lining Box
- WA088P 2 Gang 35mm Deep Dry Lining Box
- WA106P 1 Gang 47mm Deep Dry Lining Box
- WA107P 2 Gang 47mm Deep Dry Lining Box
- WA108P Round Ceiling 34mm Deep Dry Lining Box

Spacer Gaskets

- VP095BK 1 Gang 10mm Spacer Gasket - Black
- VP095GY 1 Gang 10mm Spacer Gasket - Grey
- VP095WH 1 Gang 10mm Spacer Gasket - White
- VP096BK 2 Gang 10mm Spacer Gasket - Black
- VP096GY 2 Gang 10mm Spacer Gasket - Grey
- VP096WH 2 Gang 10mm Spacer Gasket - White

Deco® Gaskets

- SP011 1 Gang Deco® Gasket - Black
- SP012 2 Gang Deco® Gasket - Black
- SP013 1 Gang Deco® Gasket - White
- SP014 2 Gang Deco® Gasket - White
- SP021 1 Gang Deco® Gasket - Grey
- SP022 2 Gang Deco® Gasket - Grey

essentials™

For the complete range of back boxes see Essentials™ page N7.

FlameGuard® back boxes have been tested and conform to both fire and acoustic BS EN standards. Fire: BS EN 1364-1 Acoustic: BS EN ISO 140-2. Complies with Building Regulations Fire tested up to 90 minutes with the capability of the boxes being mounted back to back.