

Making your
home smarter⁺

Issue 3

ClickSmart⁺




- 02** Welcome to Click Smart+
- 03** About Click Smart+
- 04** How it works
- 05** Click Smart+ App
- 07** Getting set up
- 09** Click Smart+ Hub
 - 11** Smart Decorative Wiring Accessories
 - 17** Smart Antiviral & Antibacterial Certified Wiring Accessories
 - 19** Smart Fused Connection Unit
 - 21** Wireless Smart Scenario Switch
 - 23** Smart Socket
 - 25** Smart Security
 - 27** Smart Sensors
 - 33** Smart LED Tape Controller
 - 35** Smart Receivers
 - 37** Smart Kits
 - 39** 1 & 2 Gang 10mm Gaskets
 - 43** Getting Technical
 - 57** Welcome to Fort Smart Security

Can you imagine how your home could integrate itself into your daily life? Click Smart+, Scolmore's leading smart home brand, has been created to simplify and streamline your home life via the use of integrated technology.

Click Smart+ boasts an elite range of smart home products. Utilising Zigbee technology & WIFI to offer smart home solutions to new and existing wiring installations.

The possibilities of Click Smart+ are endless, but the set up – whether with WIFI or with Zigbee – is simple when using our Click Smart+ app.

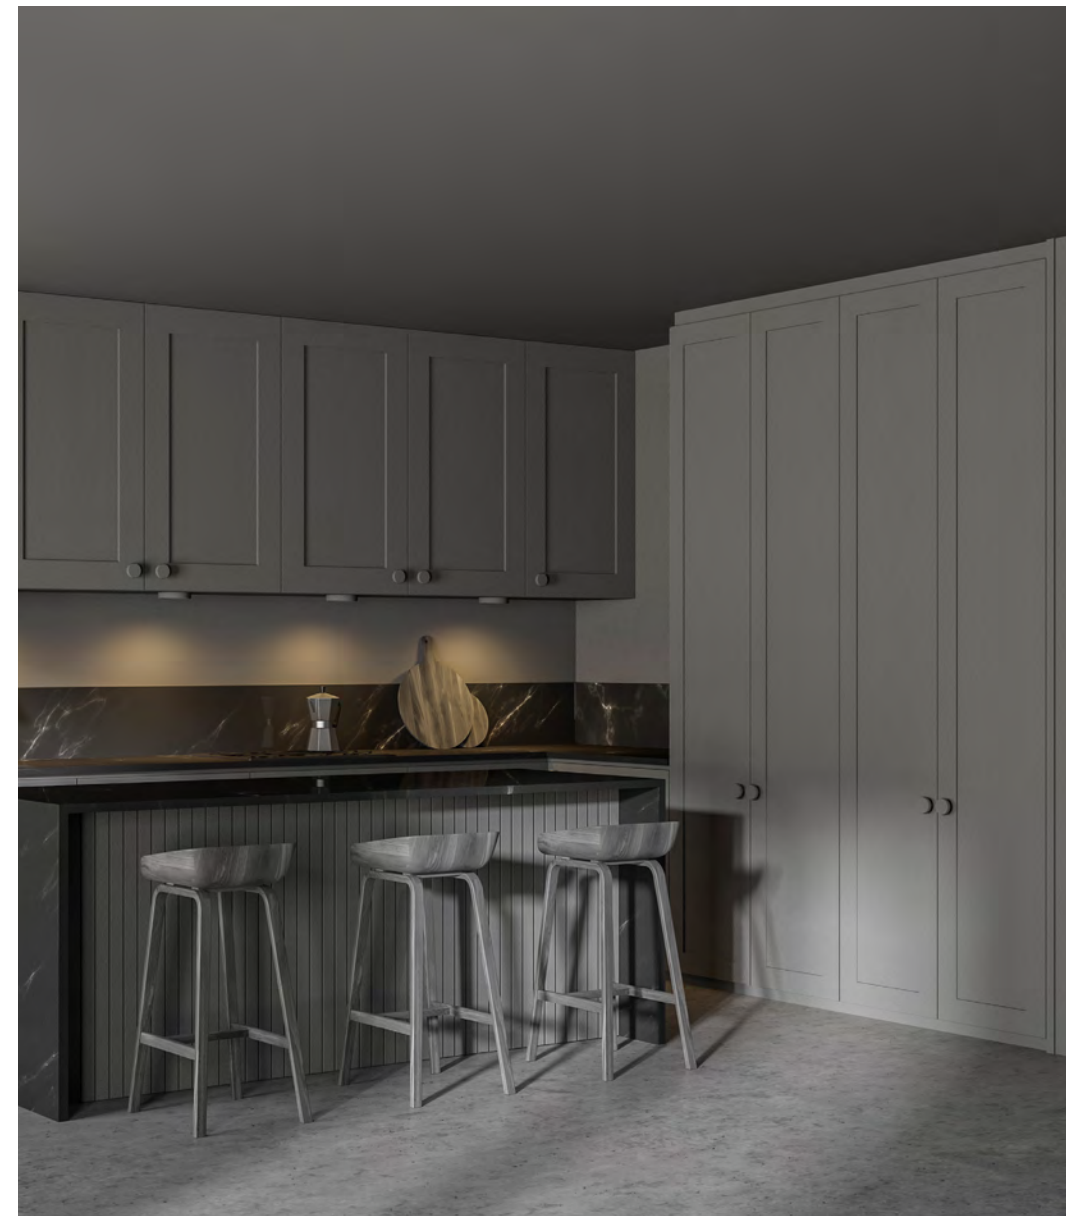

Get to know us



With Click Smart+ we create simple, beautiful smart solutions for a safer and more comfortable home. We have many products to meet all of your household needs.

Discover a whole range of smart home products. From smart sockets, cameras, sensors and receivers, all working together to make your home smarter.

The installation of Click Smart+ is simple & flexible, no additional cables or wall cutting is needed making it ideal for installation within existing or newly constructed buildings.

Each smart product comes with easy to follow installation guides which are also accessible through the new Click Smart+ app.

Make your home smarter, more comfortable and safer with any of our smart products. Why not get creative and take control of your home?

Look out for the Click Smart+ icon...

Products with this icon are compatible across the whole Click Smart+ range.


Get smart with Zigbee

Zigbee devices can send and receive data between other Zigbee devices and the Hub. This means you can daisy chain smart devices and link them to a central hub, even when some of these devices are out of (direct) range of that hub.*

Zigbee increases flexibility for users and developers, delivering the confidence that products and services will work together through standardisation and testing.

A mesh network/daisy chain is when a network connection is spread out among wireless devices that can communicate with each other and share a network across a large area.

Zigbee's ability to support mesh networking means it can boost data transmission range and provide greater stability (even when a single connected device fails and doesn't work).

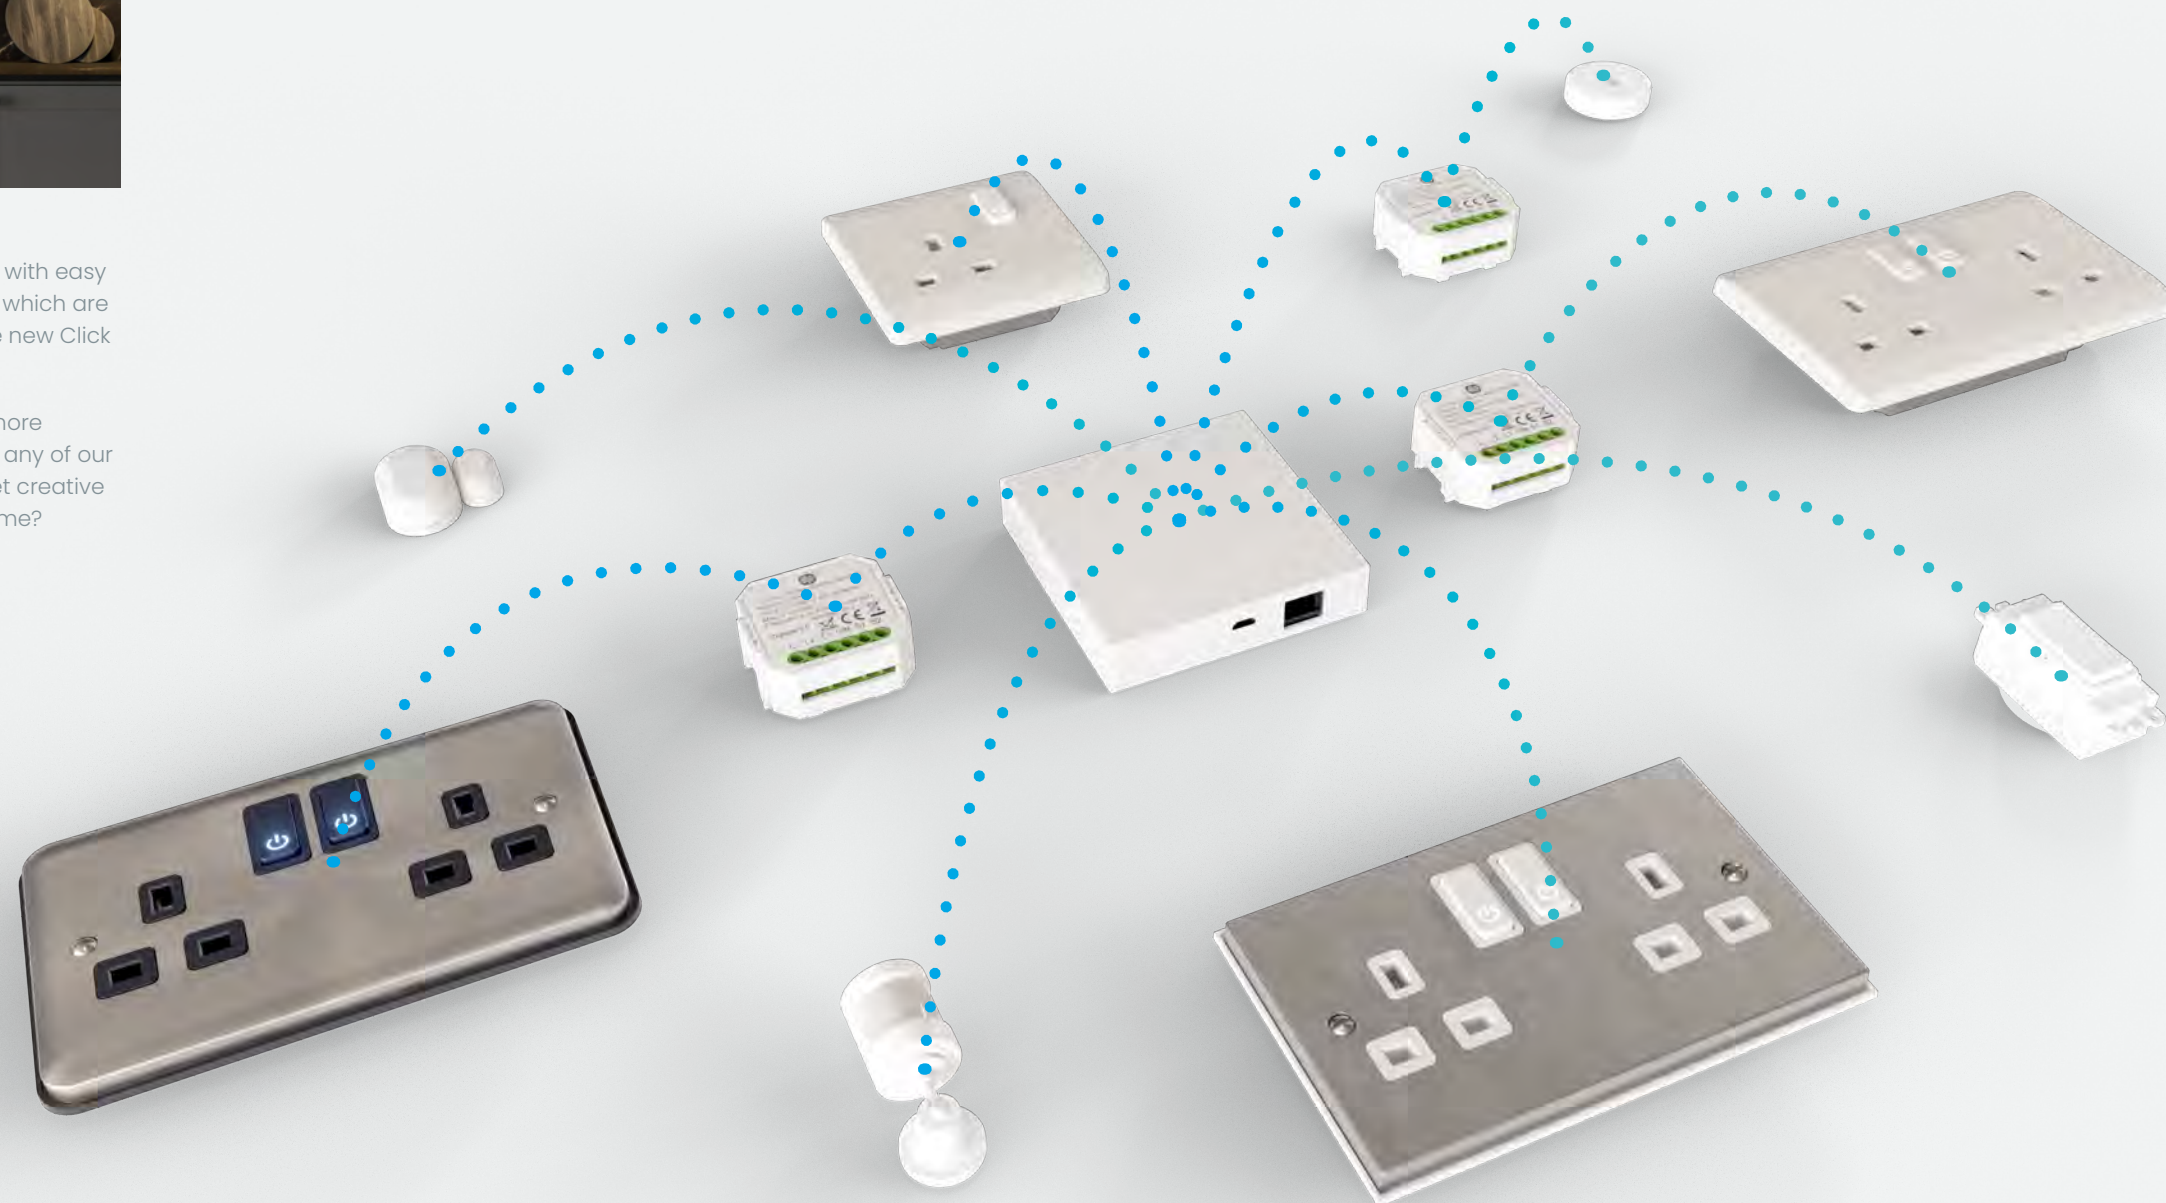

*Click Smart+ works on a Tree-based Wireless Mesh Network. Battery operated devices cannot boost the data transmission range.

Get Creative

Automate your home with the Click Smart+ app.

'Tap to Run' Smart Scenes

Tap-to-run also known as 'Scenes' enables you to run multiple devices with a single tap of a button (within the Click Smart+ app). Think of this as one switch for a group of products.

For example you can create a Tap-to-run called 'Good Evening' which turns all your smart products on at once, instead of manually tapping each product within the app. Tap-to-runs can also control delay timings.

To control your Click Smart+ products through voice control you must have an Amazon Alexa speaker or a Google Home Speaker set up in your home and connected to the Click Smart+ app.



'Automation' Smart Scenes

Automations control your devices automatically when a condition is changed.

For example, you could programme a PIR detector with a switching receiver. When the PIR detector senses movement the automation (set up in the Click Smart+ app) can tell the switching receiver to turn 'ON' automatically.

Automations also allow you to set up timing Schedules for a group or singular smart products.

To control your Click Smart+ products through voice control you must have an Amazon Alexa speaker or a Google Home Speaker set up in your home and connected to the Click Smart+ app.




Stay Connected

Access your smart devices wherever you are and control them with Google or Alexa.

Control wherever you are

Peace of mind away from home. Easily check and change the status of your Click Smart+ devices wherever you are.

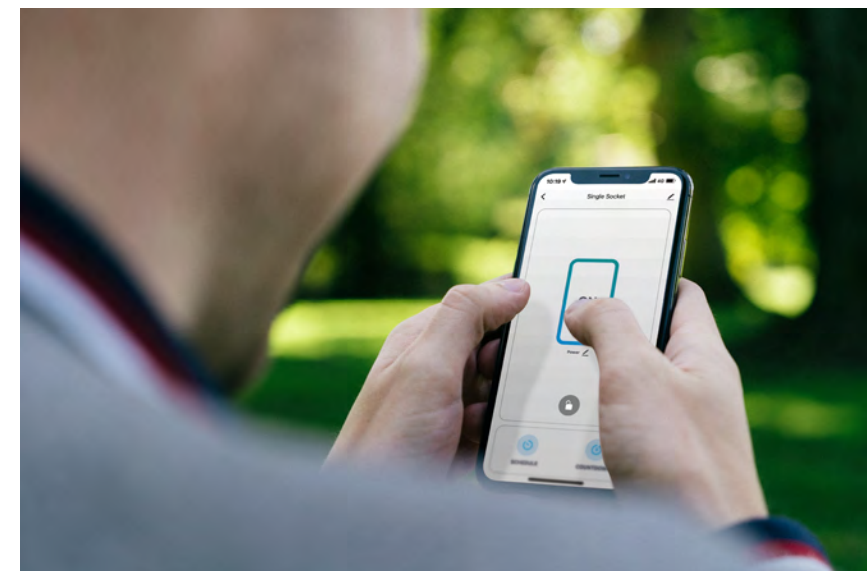

Hey Google!

Connect Click Smart+ to your existing Google Home devices. Just search for Click Smart+ in the Google Home app.




Alexa...

Have an Amazon smart speaker? Link your Click Smart+ devices in the Alexa app.




Start smart

Click Smart+ Hub – Set up Guide.

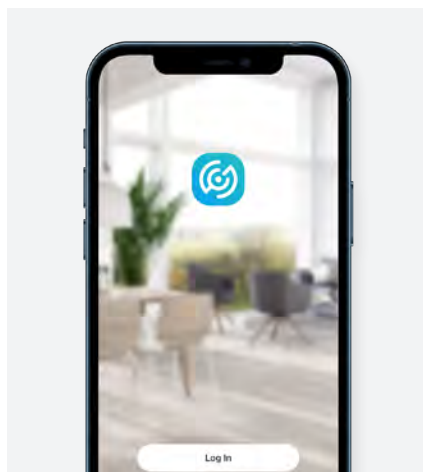


Click Smart+ App

Search and download the Click Smart+ app on ios or android devices. You will need the app to add, control and link all of your Click Smart+ devices.

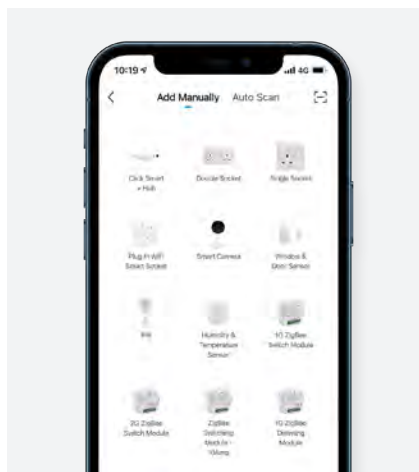

Adding the Hub

Once you are in the Click Smart+ app press the '+' icon and choose the Smart Hub, or use the auto scan feature to automatically detect your device.

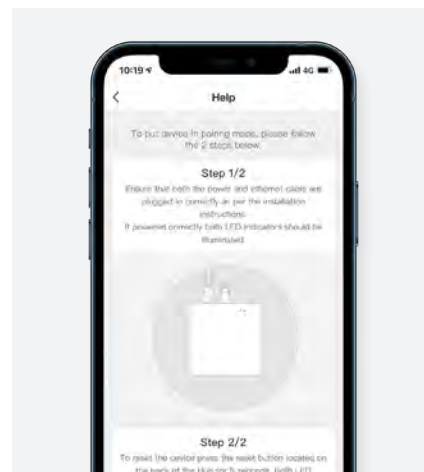

Complete Set Up

Once the app has found the Smart Hub simply follow the on screen instructions.

See your home, away from home

Click Smart+ Camera – Set up Guide.




Power Up!

After finding your perfect location, simply plug in your camera to a standard UK socket outlet.



Pairing Mode

You should now see a solid red LED light, after 10 seconds you should hear a chime & see a flashing LED light. You are now in pairing mode.

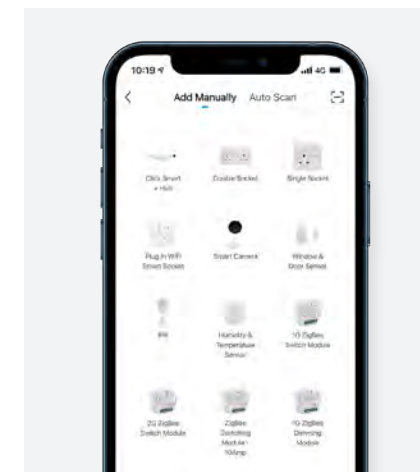


Complete Set Up

Open the Click Smart+ app and press the '+' icon and choose the Smart Camera. Then simply follow the on screen instructions.


Your home, your way

Click Smart+ Zigbee Products – Set up Guide.

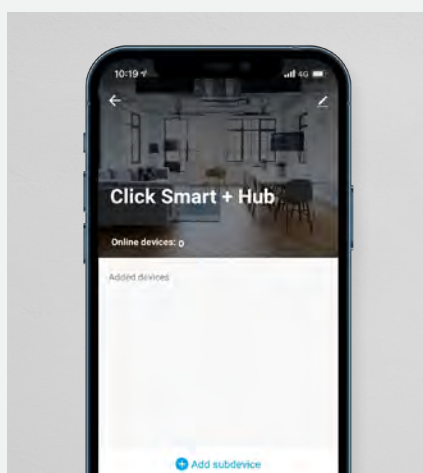


Click Smart+ Hub

Before setting up any Click Smart+ Zigbee supported products, please make sure you have set up your Smart Hub.

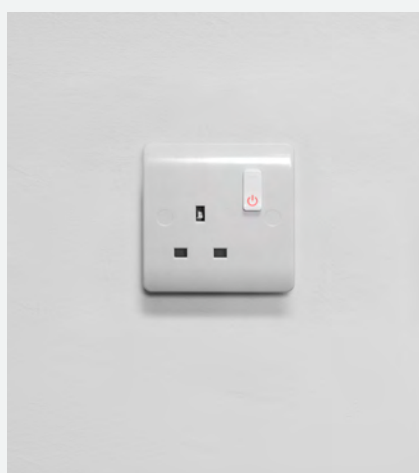

Installing

Once you have finished your installation, your Click Smart+ Zigbee supported product will automatically enter pairing mode.

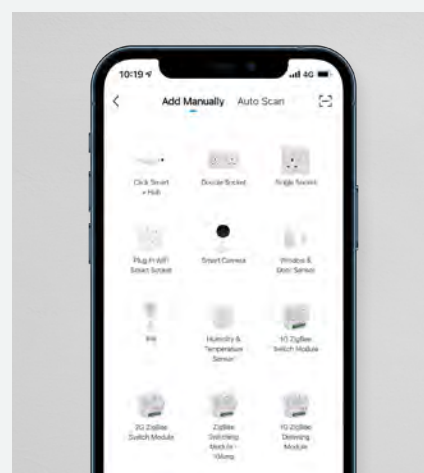


Complete Set Up

Open the Click Smart+ app press the '+' icon and choose the correct product, or use the auto scan feature to automatically detect your device.

A smarter switch

Switching & Dimming Receivers – Set up Guide.

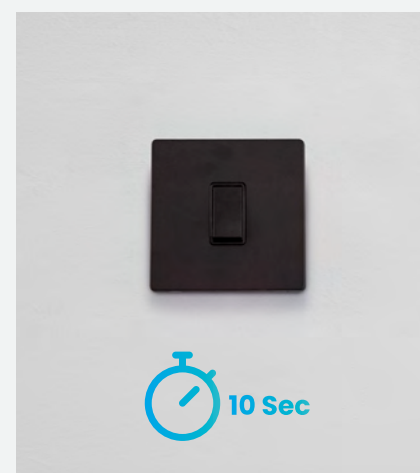


Dimming Receiver

Install the receiver as per the provided instructions. With the light switch off, press the retractive switch down and hold for 10 seconds. The LED light on the receiver will flash. You are now in pairing mode.



Switching Receiver

Once wired up, flick the switch on & off 5 times until the light no longer turns on or off. You will also be able to see a flashing LED on the receiver. You are now in pairing mode.

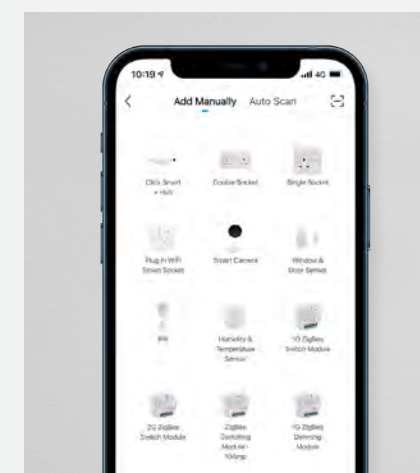

Complete Set Up


Open the Click Smart+ app press the '+' icon and choose the correct receiver, or use the auto scan feature to automatically detect your device.



CSP010 - Smart Hub wired to a home WIFI router.

Smart Hub

CSP010 - Smart Gateway Hub

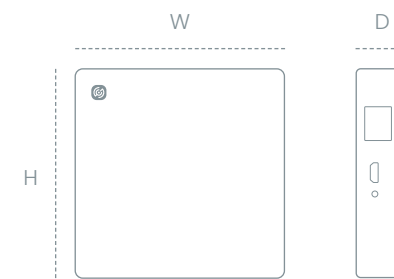

- Supplied with plug in adaptor, USB cable and ethernet cable

Wireless Zigbee smart control

RATED VOLTAGE (DC)

1.8 - 3.3

MAX PAIRED DEVICES

256 paired devices max.
(Depending on products connected)

CABLE TYPE

Micro USB

DIMENSIONS (MM)

90 (L) x 90 (W) x 23 (D)

FINISH

White

PRODUCT WARRANTY (YEARS)

1

*For more information on max paired devices please see CSP010 Data sheet





Wireless Zigbee smart control

Control manually, via the app or voice control

The power to each socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)

3

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

240 & 50

MINIMUM BACK BOX DEPTH (MM)

35

DIMENSIONS (MM)

86 (W) x 86 (H) x 4 (D)

CONNECTIVITY

- WIFI Secure Connection
 Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



Wireless Zigbee smart control

Control manually, via the app or voice control

The power to each socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)

3

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

240 & 50

MINIMUM BACK BOX DEPTH (MM)

35

DIMENSIONS (MM)

146 (W) x 86 (H) x 4 (D)

CONNECTIVITY

- WIFI Secure Connection
 Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



Deco Plus

Premium Decorative Wiring Accessories



Wireless Zigbee smart control

Control manually, via the app or voice control

The power to each socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)

3

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

240 & 50

MINIMUM BACK BOX DEPTH (MM)

25

DIMENSIONS (MM)

88 (W) x 88 (H) x 8 (D)

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



Wireless Zigbee smart control

Control manually, via the app or voice control

The power to each socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)

3

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

240 & 50

MINIMUM BACK BOX DEPTH (MM)

25

DIMENSIONS (MM)

146 (W) x 88 (H) x 8 (D)

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)





Wireless Zigbee smart control

Control manually, via the app or voice control

The power to each socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)

3

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

240 & 50

MINIMUM BACK BOX DEPTH (MM)

25

DIMENSIONS (MM)

88 (W) x 88 (H) x 8 (D)

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



Wireless Zigbee smart control

Control manually, via the app or voice control

The power to each socket can be locked On or Off using the app, preventing manual switching

3 pin safety shutter (The shutter will only open once all three plug pins are inserted)

PRODUCT WARRANTY (YEARS)

3

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

240 & 50

MINIMUM BACK BOX DEPTH (MM)

25

DIMENSIONS (MM)

146 (W) x 88 (H) x 8 (D)

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



Mode

Antiviral & Antibacterial Certified Wiring Accessories



Stylish smooth profile plate

The power to each socket can be locked On or Off using the app, preventing manual switching

Wireless Zigbee smart control

Control manually, via the app or voice control

PRODUCT WARRANTY (YEARS)

3

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

240 & 50

MINIMUM BACK BOX DEPTH (MM)

25

DIMENSIONS (MM)

86 (W) x 86 (H) x 9.5 (D)

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



MODE®



Stylish smooth profile plate

The power to each socket can be locked On or Off using the app, preventing manual switching

Wireless Zigbee smart control

Control manually, via the app or voice control

PRODUCT WARRANTY (YEARS)

3

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

250 & 50

MINIMUM BACK BOX DEPTH (MM)

25

DIMENSIONS (MM)

146 (W) x 86 (H) x 9.5 (D)

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Sockets require the Click Smart+ Hub (Sold separately)



Lock and unlock using the Click Smart+ app.




FCU Gasket

The gasket comes supplied with the Fused Connection Unit, which features an optional cable outlet.

Smart Fused Connection Units

CMA30651 - 13A Zigbee Smart Switched Fused Connection Unit



+ Wireless Zigbee smart control

Control manually, via the app or voice control

The power to the FCU can be locked On or Off using the app, preventing manual switching

Gasket supplied features cable outlet with restraint

LOAD RATING (A)

13

RATED VOLTAGE (V~) & FREQUENCY (Hz)

240 & 50

MINIMUM BACK BOX DEPTH (MM)

25 (With Gasket) 35 (Without Gasket)

DIMENSIONS (MM)

86 (W) x 86 (H) x 9 (D)

FINISH


Polar White

PRODUCT WARRANTY (YEARS)

3

CONNECTIVITY

- WiFi Secure Connection
- Zigbee Wireless Connection




*Smart Fused Connection Unit require the Click Smart+ Hub (Sold separately)

Control your lights
and appliances from
wherever you are.



Wireless Smart Scenario Switch

CSPGM2075BK / CSPGM2075PW - Smart GridPro Scenario Switch



Wireless Smart Switch

Pair to the Click Smart+ Hub using the app. Control individual or multiple Click Smart+ products.

1 Year Battery Life (Dependant on use)

Screw in modules (1-4 Gang Plates)

Clip-in modules

Standard GridPro module with all the GridPro features and benefits.

DETECTION RANGE (M)

<50

BATTERY TYPE

CR 2032 (Supplied)

DIMENSIONS (MM)

24.5 (W) x 50 (H) x 22.5 (D)

PRODUCT WARRANTY (YEARS)

2

CONNECTIVITY

- WiFi Secure Connection
- Zigbee Wireless Connection




*Wireless Smart Switch requires the Click Smart+ Hub (Sold separately)

A simple way to
automate your
smart home.



Smart Socket

CSP060 – 13A Smart Plug-in WIFI Socket

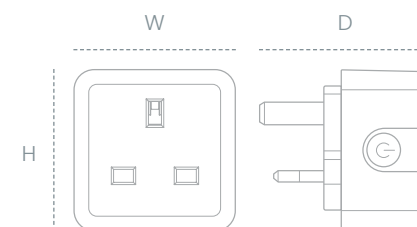

 Utilise standard UK sockets installed

Control manually, via the app or
voice control

LOAD RATING (A)

13

VOLTAGE (V~) & FREQUENCY (Hz)

230 & 50/60

DIMENSIONS (MM)

57 (W) x 57 (H) x 65 (D)

FINISH


White

PRODUCT WARRANTY (YEARS)

2

CONNECTIVITY


- WIFI Secure Connection
- Zigbee Wireless Connection

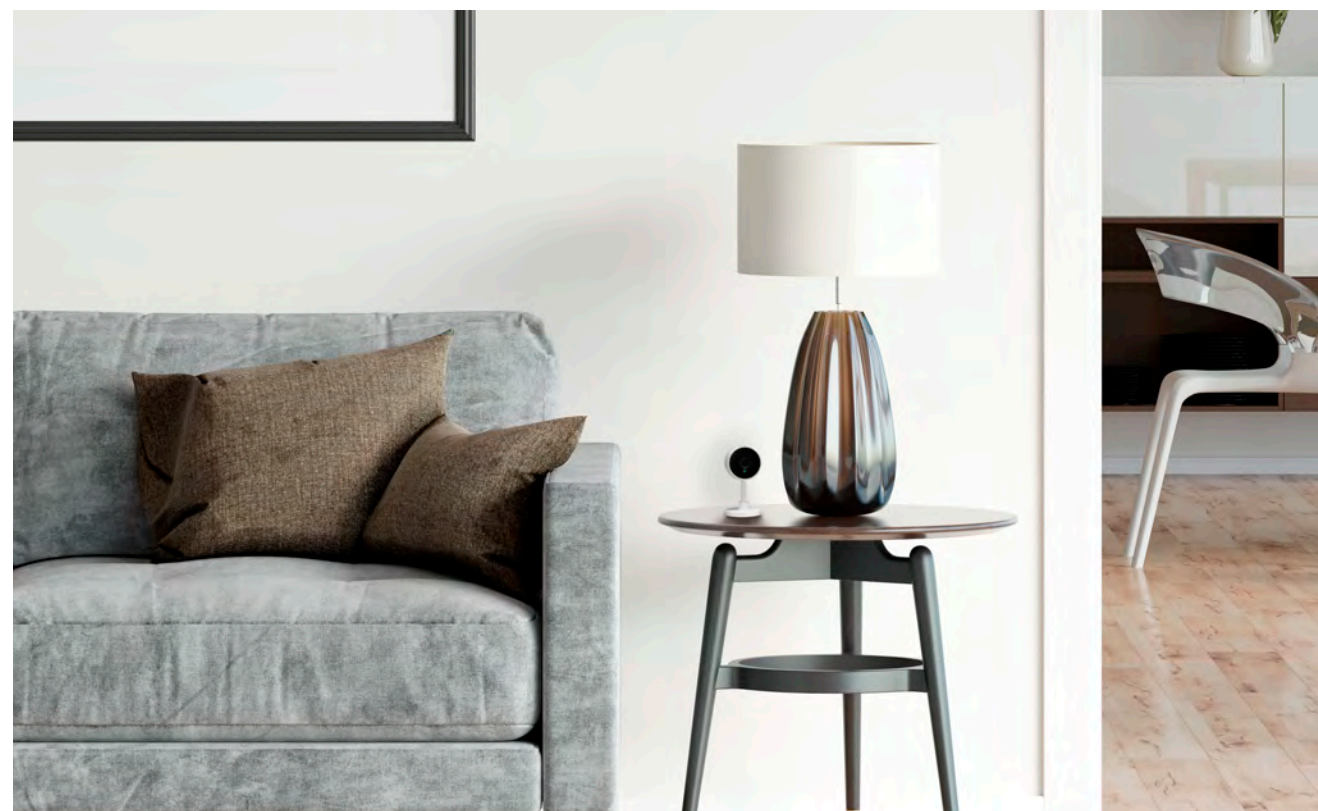

CSP020 - Smart Camera shown wall mounted and free-standing.

Smart Camera

CSP020 - Smart Camera

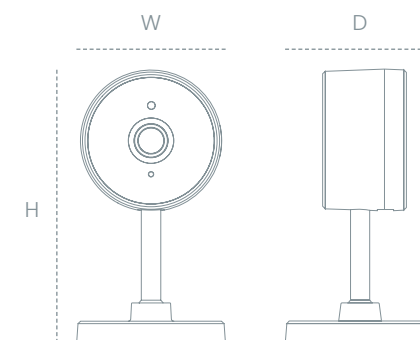

- + 1080p resolution
- Motion detection available
- 7 metre night vision
- Microphone & speaker (2 way push-to-talk)
- Indoor use only
- Plug-in adapter supplied

RATED VOLTAGE (DC)

5

STORAGE

128GB Max. (Micro SD Card
- Not Supplied)

FIELD ANGLE (°)

114 (Diagonal)

DIMENSIONS (MM)

34 (W) x 58 (D) x 116 (H)

FINISH

White

PRODUCT WARRANTY (YEARS)

1

CONNECTIVITY

- WiFi Secure Connection
- Zigbee Wireless Connection




**The all-seeing
eye that guards
your home.**



CSP032 - Smart PIR Sensor shown ceiling mounted.

Smart Sensors

CSP032 - Smart PIR

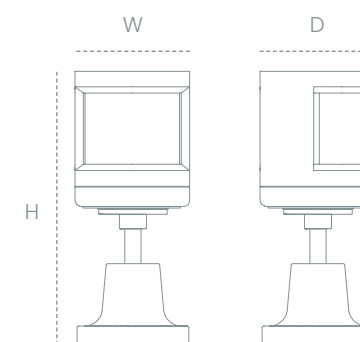

-  7 metre detection distance
- Wireless Zigbee smart control
- Sticky pads supplied and fitted

SENSOR

Infrared

DETECTION RANGE (M)

7

DETECTION ANGLE (°)

170

BATTERY LIFETIME (APPROX)

1 Year (Dependent On Use)

DIMENSIONS (MM)

33 (W) x 33 (D) x 39.5 (H)

FINISH


White

PRODUCT WARRANTY (YEARS)


1

CONNECTIVITY

- WiFi Secure Connection
- Zigbee Wireless Connection




*Smart Sensors require the Click Smart+ Hub (Sold separately)

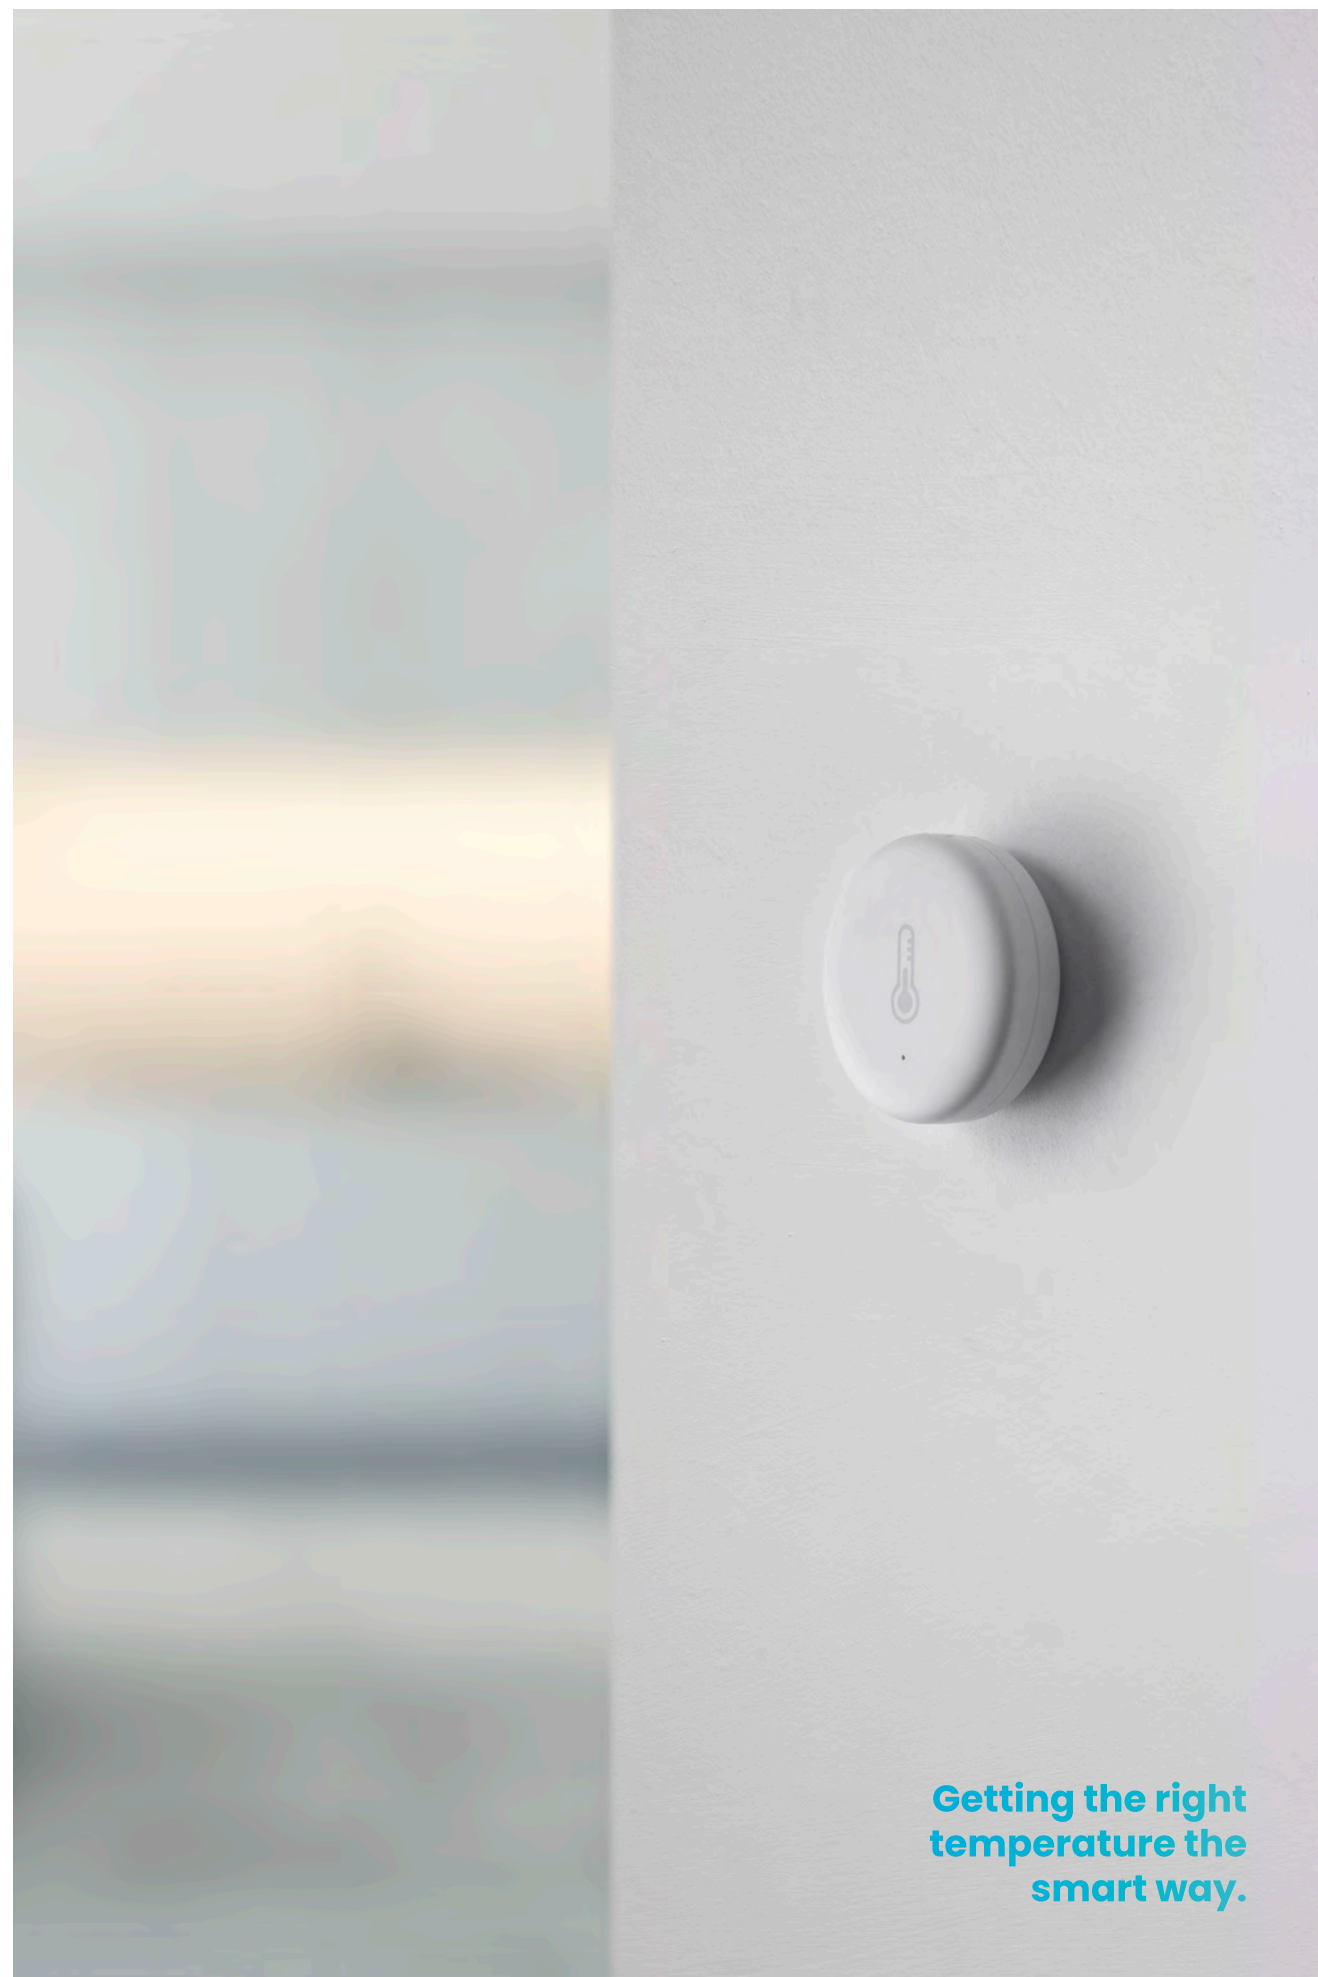


Getting the right
temperature the
smart way.

Smart Sensors

CSP033 – Smart Temperature & Humidity Sensor

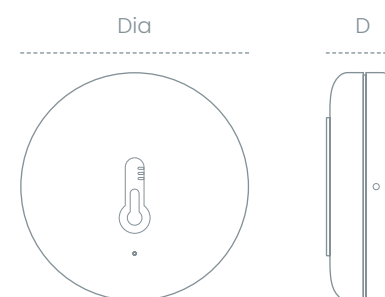

 Temperature range -10°C - +50°C

Wireless Zigbee smart control

CR 2032 battery supplied

TEMPERATURE DETECTION RANGE (°C)

-10 to +50

HUMIDITY DETECTION RANGE (%)

Detection accuracy ±3%

BATTERY LIFETIME (APPROX)

1 Year (Dependent On Use)

DIMENSIONS (MM)

37 (Dia.) x 11.6 (D)

FINISH

White

PRODUCT WARRANTY (YEARS)

1

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Sensors require the
Click Smart+ Hub (Sold separately)


Real time monitoring for
door and window status.



CSP031 - Smart Sensors internally fitted on garden doors.

Smart Sensors

CSP031 - Smart Window & Door Sensor

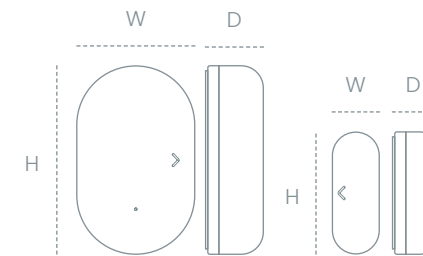

 Detection distance 10-20mm
between transmitter and magnet

Wireless Zigbee smart control

CR 2032 battery supplied

ACTIVATION DISTANCE (MM)

10 - 20 (Between Sensor & Magnet)

BATTERY LIFETIME (APPROX)

1 Year (Dependent On Use)

TRANSMITTER DIMENSIONS (MM)

40 (L) x 25 (W) x 14.5 (D)

MAGNET DIMENSIONS (MM)

26 (L) x 10 (W) x 9 (D)

FINISH

White

PRODUCT WARRANTY (YEARS)


1

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Sensors require the
Click Smart+ Hub (Sold separately)

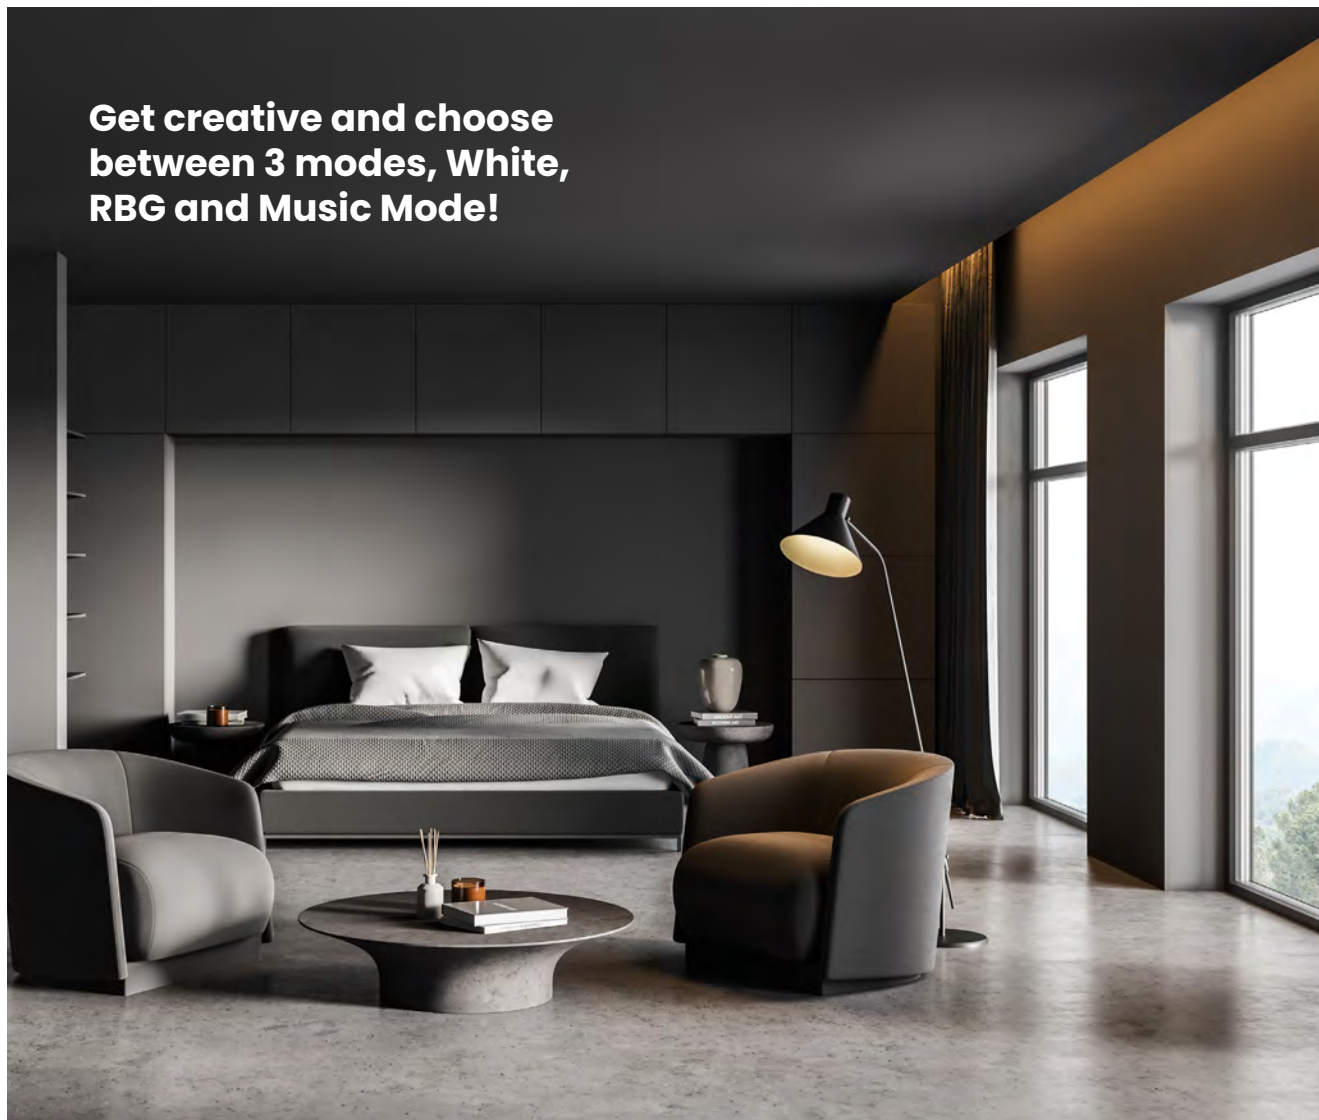


Get creative and choose between 3 modes, White, RBG and Music Mode!



CSP071 - Smart RGBW LED Tape Controller

Smart LED Tape Controller

CSP071 - Smart RGBW LED Tape Controller

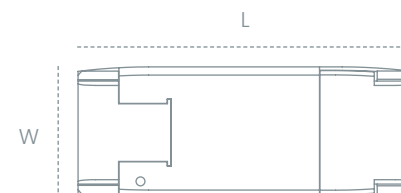

- ➕ Wireless Control Solution,
- 3 Modes (White/Colour/Music),
- Dimming & Saturation Options,
- Change to control single colour or RGBW tape,
- Control with the Click Smart+ App,
- Compatible with all current OVIA LED Tape variants.

Max Paired Devices (M)
50 (Open Air)

DETECTION RANGE (°)
360


DIMENSIONS (MM)
46 (W) x 18 (H) x 115 (L)

IP RATING
IP20

FINISH
White

PRODUCT WARRANTY (YEARS)
3


- CONNECTIVITY**
- WIFI Secure Connection
 - Zigbee Wireless Connection



*Smart LED Tape Controller requires the Click Smart+ Hub (Sold separately)

Smart Switching Receivers

Control your lights and appliances from wherever you are.

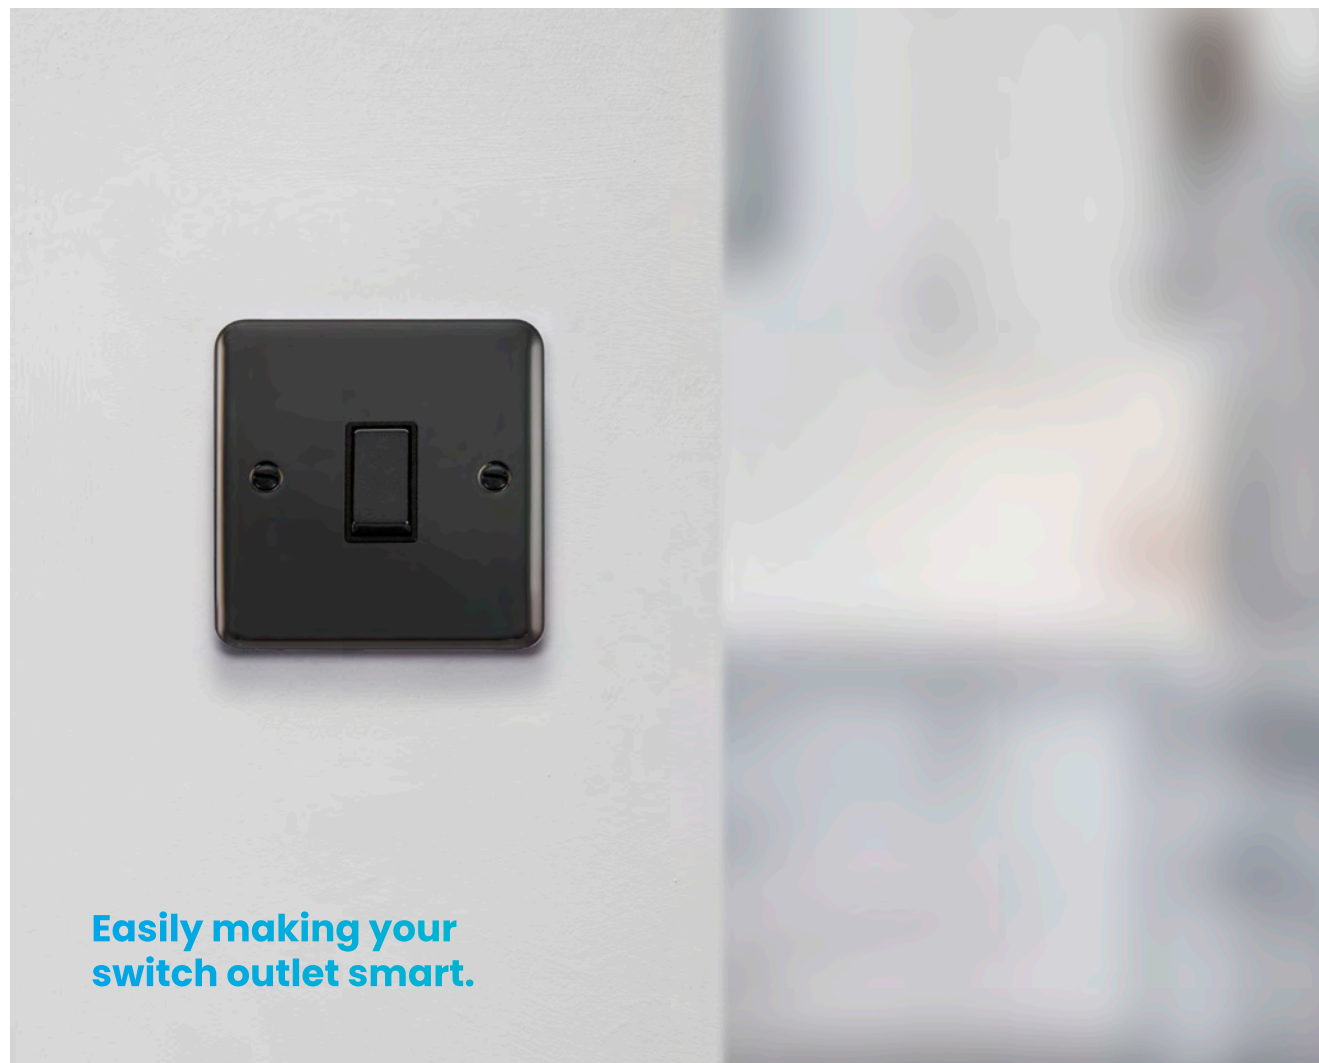

Easily making your switch outlet smart.

No neutral connection required

Utilises standard on/off switches (Except CSP043)

Up to 100 metre detection range

VOLTAGE (V~) & FREQUENCY (Hz)
220-240

WIRELESS RANGE
Up To 100 metres (Open Air)

FINISH
White

MINIMUM BACK BOX DEPTH (MM)
35 (47 Flat Plate)

DIMENSIONS (MM)
46 (W) x 46 (H) x 18 (D)

PRODUCT WARRANTY (YEARS)
2

CONNECTIVITY

- WIFI Secure Connection
- Zigbee Wireless Connection



*Smart Receivers require the Click Smart+ Hub (Sold separately)

Switching Receivers

(Utilises standard on/off switches)

CSP041

100W 1 Gang Smart Switching Receiver



LOAD RATING (W)
100 LED

CSP042

2 x 100W 2 Gang Smart Switching Receiver



LOAD RATING (W)
100 (x2) LED

CSP043

10A 1 Gang Smart Switching Receiver



LOAD RATING (W)
250 (2300) LED (Resistive)

Dimming Receivers

(Utilises retractive switches)

CSP051

150W 1 Gang Smart Dimming Receiver



LOAD RATING (W)
150 LED

CSP052

100W 2 Gang Smart Dimming Receiver



LOAD RATING (W)
100 (x2) LED


Smart Kits

Everything you need, in one box.



Mode 13A 2 Gang Smart Socket Kit

CSK002 - 1 x Smart Hub & 4 x Mode® 13A 2 Gang Zigbee Smart Socket

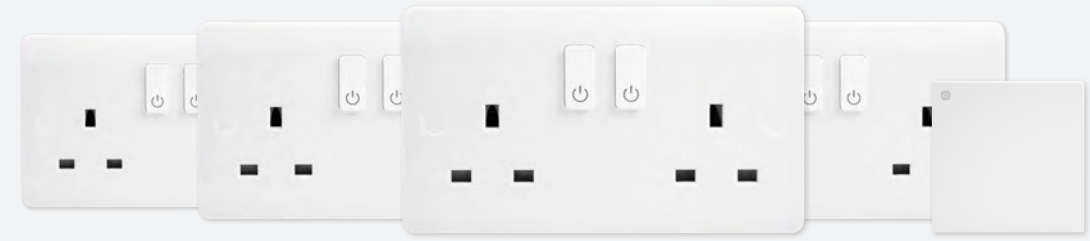

Aquip66 13A 2 Gang Outdoor Smart Socket Kit

CSK003 - 1 x Smart Hub, 1 x Mode® 13A 2 Gang Zigbee Smart Socket, 1 x 2 Gang Waterproof Enclosure



13A Plug in WiFi Smart Socket Kit

CSK001 - 4 x 13A Plug in WiFi Smart Sockets



1 & 2 Gang 10mm Gaskets

Allows the fitment of Smart receivers into a 25mm back box.



Deco Plus 1 & 2 Gang 10mm Gaskets



DP095WH
Deco Plus 1 Gang 10mm Gasket



DP095BK
Deco Plus 1 Gang 10mm Gasket



DP095GY
Deco Plus 1 Gang 10mm Gasket

DP096WH
Deco Plus 2 Gang 10mm Gasket


DP096BK
Deco Plus 2 Gang 10mm Gasket

DP096GY
Deco Plus 2 Gang 10mm Gasket

Mode 1 & 2 Gang 10mm Gaskets



CMA095
Mode 1 Gang 10mm Gasket

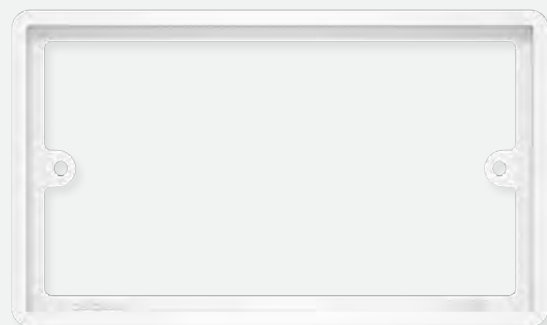

CMA096
Mode 2 Gang 10mm Gasket

Deco 1 & 2 Gang 10mm Gaskets



VP095WH
Deco 1 Gang 10mm Gasket



VP095BK
Deco 1 Gang 10mm Gasket



VP095GY
Deco 1 Gang 10mm Gasket

VP096WH
Deco 2 Gang 10mm Gasket

VP096BK
Deco 2 Gang 10mm Gasket

VP096GY
Deco 2 Gang 10mm Gasket



**Communicate and
connect with your
home - anywhere.**



Definity Range



Getting Technical

Click Smart+ app for ios & android



Metal Matt Black



Single Plate
SFMB30035*

Double Plate
SFMB30036*



*BK

Matt Black



Single Plate
SFBK30035*

Double Plate
SFBK30036*



*BK

Brushed Stainless Steel



Single Plate
SFBS30035*

Double Plate
SFBS30036*



*BK



*GY



*PW

Stainless Steel



Single Plate
SFSS30035*

Double Plate
SFSS30036*



*BK



*GY



*PW

Polished Chrome



Single Plate
SFCH30035*

Double Plate
SFCH30036*



*BK



*PW

Metal White



Single Plate
SFMW30035*

Double Plate
SFMW30036*



*PW

Polar White



Single Plate
SFPW30035*

Double Plate
SFPW30036*



*PW

*When choosing your desired product, just add your chosen inset colour (E.G. 'GY') to the end of the code.

Product Information	
Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	240 & 50
Standby Current (mA)	1
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Terminal Size (mm)	5.7 x 4.8
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange

Product Standards	
BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1	

Product Information	
Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	240 & 50
Standby Current (mA)	1
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Terminal Size (mm)	5.7 x 4.8
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange

Product Standards	
BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1	



DEFINITY 13A 1 Gang Zigbee Smart Switched Socket Outlet & Cover Plate

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on and off manually, with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



DEFINITY 13A 2 Gang Zigbee Smart Switched Socket Outlet & Cover Plate

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



Deco Plus Range



Black Nickel



Single Plate DPBN30535*
Double Plate DPBN30536*



Satin Chrome



Single Plate DPSC30535*
Double Plate DPSC30536*



Stainless Steel



Single Plate DPSS30535*
Double Plate DPSS30536*



Polished Chrome



Single Plate DPCH30535*
Double Plate DPCH30536*



Antique Brass




Single Plate DPAB30535*
Double Plate DPAB30536*



Polished Brass



Single Plate DPBR30535*
Double Plate DPBR30536*



Satin Brass



Single Plate DPSB30535*
Double Plate DPSB30536*



*When choosing your desired product, just add your chosen inset colour (E.G. 'GY') to the end of the code.

Getting Technical

Click Smart+ app for ios & android



Product Information

Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	240 & 50
Standby Current (mA)	1
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Terminal Size (mm)	5.7 x 4.8
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange

Product Standards

BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1

Product Information

Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	240 & 50
Standby Current (mA)	1
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Terminal Size (mm)	5.7 x 4.8
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange

Product Standards

BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1



DECO PLUS 13A Ingot 1 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on and off manually, with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



DECO PLUS 13A Ingot 2 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



Deco Range



Black Nickel



Single Plate
VPBN30535*

Double Plate
VPBN30536*



*BK

Satin Chrome



Single Plate
VPSC30035*

Double Plate
VPSC30036*



*BK



*GY



*WH

Stainless Steel



Single Plate
VPSS30035*

Double Plate
VPSS30036*



*BK



*GY



*WH

Polished Chrome



Single Plate
VPCH30535*

Double Plate
VPCH30536*



*BK



*WH

Pearl Nickel



Single Plate
SFPN30035*

Double Plate
SFPN30036*



*BK



*WH

Polished Brass



Single Plate
VPBR30035*

Double Plate
VPBR30036*



*BK



*WH

Satin Brass



Single Plate
VPSB30535*

Double Plate
VPSB30536*



*BK



*WH

Antique Brass



Single Plate
VPAB30035*

Double Plate
VPAB30036*



*BK

*When choosing your desired product, just add your chosen inset colour (E.G. 'GY') to the end of the code.

Getting Technical

Click Smart+ app for ios & android



Product Information

Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	240 & 50
Standby Current (mA)	1
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Terminal Size (mm)	5.7 x 4.8
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange

Product Standards

BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1

Product Information

Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	240 & 50
Standby Current (mA)	1
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Terminal Size (mm)	5.7 x 4.8
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange

Product Standards

BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1



DECO

13A Ingot 1 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on and off manually, with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



DECO

13A Ingot 2 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



Getting Technical



CMA30035 13A 1 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on and off manually, with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



Product Information	
Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	240 & 50
Standby Current (mA)	4
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Terminal Size (mm)	5.7 x 4.8
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange
Product Standards	
BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1	



CMA30036 13A 2 Gang Zigbee Smart Switched Socket Outlet

With the smart socket you can plug in home appliances like lamps, TV, heaters, fans etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.



Product Information	
Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	250 & 50
Standby Current (mA)	4
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Terminal Size (mm)	5.7 x 4.8
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange
Product Standards	
BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1	

Click Smart+ app
for ios & android



CSP010 Smart Gateway Hub

The Smart Hub is the control centre of all Zigbee Protocol devices within a smart home.

Even if the homes WIFI is unstable or interrupted smart devices will still be able to function normally.



Product Information	
Rated Voltage (DC)	1.8 - 3.3
Operational Temperature (°C)	-10 to +55
Working Humidity	10%-90%RH (Non-condensing)
Protocol	Zigbee
Wireless Technology	WIFI 801.11 b/g/n
Signal Frequency	400MHz
Ingress Protection	IP20
Indicator Colour	Green
Product Dimensions (mm)	90 (L) x 90 (W) x 23 (D)
Product Warranty (Years)	1
Product Standards	
BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3, BS EN 62311	

Product Information	
Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	240 & 50
Standby Current (mA)	1
Protocol	Zigbee
Open Air Wireless Range (M)	<160
Signal Frequency	2.4GHz
Fuse Fitted Rating & Type	13A (BS 1362)
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4
Single Pole Switched	Yes
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	White & Orange
Product Standards	
BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1	



CMA30651 13A Zigbee Smart Switched Fused Connection Unit

With the smart FCU you can control home appliances like kitchen appliances, towel rails, heaters etc.

Simply turn them on or off manually with your voice, smart device with the Click Smart+ App or with an automation, timer or schedule.

Even if the homes WIFI is unstable or interrupted smart devices will still be able to function normally.



Getting Technical



CSPGM2075PW Smart GridPro Scenario Switch

The Wireless Smart Switch has 3 programmable switch press types for both the top and bottom button.

Choose from a single press, double press or long press (5 seconds).

This gives you a minimum of 6 possible scenarios for controlling your Click Smart+ products.



Product Information	
Rated Voltage (DC)	3
Battery Lifetime (Approx)	300 Days (Dependent On Use)
Protocol	Zigbee
Signal Frequency	2.4GHz
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	Blue
Minimum Back Box Depth (mm)	25 (35 Flat Plate)
Product Dimensions (mm)	24.5 (W) x 50 (H) x 22.5 (D)
Product Warranty (Years)	2
Product Standards	
BS EN 62368-1, BS EN 62479, BS EN 50663, ETSI EN 301 489-1, ETSI EN 301 489-17 & EN 300 328 V2.2.2	



CSPGM2075BK Smart GridPro Scenario Switch

The Wireless Smart Switch has 3 programmable switch press types for both the top and bottom button.

Choose from a single press, double press or long press (5 seconds).

This gives you a minimum of 6 possible scenarios for controlling your Click Smart+ products.



Product Information	
Rated Voltage (DC)	3
Battery Lifetime (Approx)	300 Days (Dependent On Use)
Protocol	Zigbee
Signal Frequency	2.4GHz
Operational Temperature (°C)	-5 to +40
Ingress Protection	IP20
Indicator Colour	Blue
Minimum Back Box Depth (mm)	25 (35 Flat Plate)
Product Dimensions (mm)	24.5 (W) x 50 (H) x 22.5 (D)
Product Warranty (Years)	2
Product Standards	
BS EN 62368-1, BS EN 62479, BS EN 50663, ETSI EN 301 489-1, ETSI EN 301 489-17 & EN 300 328 V2.2.2	

Click Smart+ app
for ios & android



CSP060 13A Smart Plug-in WIFI Socket

With the smart plug, you can plug in home appliances like toasters, electric kettles, lamps etc.

Simply turn them on or off manually with your voice, mobile phone or an automation. It can be controlled through existing WIFI network via the Click Smart+ app.



Product Information	
Load Rating (A)	13
Voltage (V~) & Frequency (Hz)	230 & 50/60
Standby Current (mA)	<100
Protocol	WIFI
Signal Frequency	2.4GHz
Operational Temperature (°C)	-20 to +40
Ingress Protection	IP20
Indicator Colour	Blue
Product Dimensions (mm)	57 (W) x 57 (H) x 65 (D)
Product Warranty (Years)	2
Product Standards	
BSI363-3, BS EN 55035, BS EN 61000-3-2 & BS EN 61000-3-3, BS EN 301489-1 & BS EN 301489-17, BS EN 62311	

Product Information	
Load Rating (A)	1
Rated Voltage (DC)	5
Resolution	1080p
Field Angle (°)	114 (Diagonal)
Aperture	F2.0 (Fixed)
Lens Zoom (mm)	2.8
Protocol	WIFI
Signal Frequency	2.412 to 2.4835GHz
Working Humidity	≤95%
Operational Temperature (°C)	-10 to +45
Ingress Protection	IP20
Indicator Colour	Red / Green
Product Standards	
BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3, BS EN 62311	



CSP020 Smart Camera

Plug and play smart camera. Simply place or mount using the self adhesive pad included. Install micro SD card and record playback.

When an object or person moves in the detection field the app sends an alarm and captures images in real time.

Additional settings can be added via the app to activate smart receivers controlling lighting and other connected devices.



Getting Technical



CSP032 Smart PIR

The PIR senses motion as you get up in the night and automatically turns on a lamp when automated with the Smart Sockets or Smart Switching Receiver on the Click Smart+ app.



Product Information	
Rated Voltage (DC)	3
Battery Type	CR 2450 (Supplied)
Battery Lifetime (Approx)	1 Year (Dependent On Use)
Sensor	Infrared
Detection Range (M)	7
Detection Angle (°)	170
Protocol	Zigbee
Signal Frequency	2.4GHz
Working Humidity	10%-90%RH
Operational Temperature (°C)	-10 to +50
Ingress Protection	IP20
Indicator Colour	Blue
Product Standards	
BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311	



CSP033 Smart Temperature & Humidity Sensor

Whenever the sensor identifies that your homes temperature or humidity is outside your defined zone of comfort, the heater, fan or other relevant devices that are plugged into your smart socket will automatically activate.

This ensures that your homes environment condition remains stable and comfortable.



Product Information	
Rated Voltage (DC)	3
Battery Type	CR 2032 (Supplied)
Battery Lifetime (Approx)	1 Year (Dependent On Use)
Protocol	Zigbee
Signal Frequency	2.4GHz
Temperature Accuracy (%)	±3
Temperature Detection Range (°C)	-10 to +50
Humidity Detection Range (%)	0 to 100
Working Humidity	0%-100%RH (Non-condensing)
Operational Temperature (°C)	-10 to +50
Ingress Protection	IP20
Indicator Colour	Blue
Product Standards	
BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311	

Click Smart+ app
for ios & android



CSP031 Smart Window & Door Sensor

Install the Smart Window & Door Sensor to a main or back door.

Install a switching/dimming receiver to a light or switch and then set up automations on the Click Smart+ app.

Your lights will turn on automatically to greet you when you are back home or going in the garden at night.



Product Information	
Rated Voltage (DC)	3
Battery Type	CR 2032 (Supplied)
Battery Lifetime (Approx)	1 Year (Dependent On Use)
Protocol	Zigbee
Signal Frequency	2.4GHz
Activation Distance (mm)	10 - 20 (Between Sensor & Magnet)
Working Humidity	0%-95%RH (Non-condensing)
Operational Temperature (°C)	-10 to +50
Ingress Protection	IP20
Indicator Colour	Blue
Product Standards	
BS EN 60950-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3 , BS EN 62311	

Product Information	
Load Rating (A)	8
Rated Voltage (DC)	12 to 24
Standby Current (mA)	50
Battery Lifetime (Approx)	1 Year (Dependent On Use)
Protocol	Zigbee
Open Wireless Range (M)	<50
Signal Frequency	2.400 to 2.483GHz
Working Humidity	≤95%
Operational Temperature (°C)	-20 to +45
Ingress Protection	IP20
Product Dimensions (mm)	46 (W) x 18 (H) x 115 (L)
Product Warranty (Years)	3
Product Standards	
BS EN 62368-1, BS EN 62479, BS EN 50663, ETSI EN 301 489-1, ETSI EN 301 489-17 & EN 300 328 V2.2.2	



CSP071 Smart RGBW LED Tape Controller

Use the new Smart LED Tape Controller and the Click Smart+ App to create a wide range of lighting effects that suits your current mood. Your LED lights will be controlled in a variety of colours to help create the perfect atmosphere.



Getting Technical



Smart Switching Receivers

Click Smart+ receivers control your lights and appliances from wherever you are.

All the receivers come supplied with a removable bracket. The bracket can be used to mount the receivers in a back box if installed directly behind the switch or at the light source.

The bracket also features a DIN rail clip, allowing the installer to directly install in the consumer unit.

Utilises standard on/off switches.



* The switching receivers do not require a neutral supply (except CSP043). The Click Smart+ receivers require a permanent live supply which will then enable switching of the respective live outputs to the devices.

Product Information	CSP041	CSP042	CSP043
Load Rating (W)	100	100 (x2)	250 (2300)
Indicator Colour	Blue	Blue	Green
Voltage (V~) & Frequency (Hz)	220-240 & 50/60		
Working Current (mA)	10		
Standby Current (mA)	1		
Protocol	Zigbee		
Signal Frequency	2.400 to 2.484GHz		
Open Air Wireless Range (M)	<100		
Terminal Size (mm)	3 x 2		
Terminal Torque (Nm)	0.2		
Terminal Capacity - Solid (mm ²)	3 x 1.5		
Minimum Back Box Depth (mm)	35 (47 Flat Plate)		
Operational Temperature (°C)	-10 to +40		
Ingress Protection	IP20		

Product Standards

BS EN 60669-2-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3, BS EN 62311

Click Smart+ app
for ios & android



Smart Dimming Receiver

Packed with all the same great features as the Switching Receivers but with added dimming capabilities.

Utilises retractive switches.



Product Information	CSP051	CSP052
Load Rating (W)	150	100 (x2)
Indicator Colour	Blue	
Voltage (V~) & Frequency (Hz)	220-240 & 50/60	
Working Current (mA)	20	
Standby Current (mA)	3	
Protocol	Zigbee	
Signal Frequency	2.400 to 2.4835GHz	
Open Air Wireless Range (M)	<100	
Terminal Size (mm)	3 x 2	
Terminal Torque (Nm)	0.2	
Terminal Capacity - Solid (mm ²)	3 x 1.5	
Minimum Back Box Depth (mm)	35 (47 Flat Plate)	
Operational Temperature (°C)	-10 to +40	
Ingress Protection	IP20	

Product Standards

BS EN 60669-2-1, BS EN 55035, BS EN 61000-3-2, BS EN 61000-3-3, BS EN 62311

*The dimming receivers do not require a neutral supply. The Click Smart+ receivers require a permanent live supply which will then enable switching and dimming of the respective live outputs to the lighting.

Welcome to Fort Smart Security Products.



At ESP® we create simple, smart solutions for a safer and more comfortable home.


We have many products to meet all your household needs. Discover a whole range of smart home products. From smart alarm kits, smart cameras, smart sensors and smart door bells, all working together to make your home smarter and safer.

The installation of our Fort range is simple & flexible, making it ideal for installation within existing or newly constructed buildings.

Each smart product comes with easy to follow installation guides which are also accessible through the new Click Smart+ app.

Make your home smarter, more comfortable and safer with any of our smart products.


Why not get creative and take control of your home?




Smart Alarm Kits




Smart Security Alarms

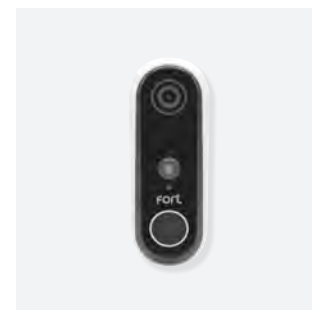

Smart Doorbells

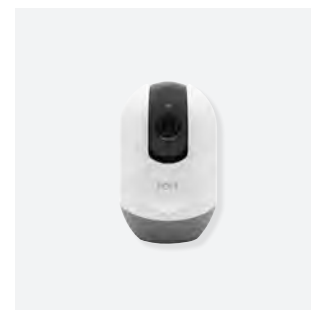

Smart Security Cameras



Smart Security Lights

United Kingdom



Scolmore House
Mariner, Lichfield Road Industrial Estate
Tamworth, Staffordshire, B79 7UL

+44 (0) 1827 63454
sales@scolmore.com
www.click-smart.com



Southern Ireland

CLICK[®] Litehouse

18 Corrig Road,
Sandyford Industrial Estate,
Dublin, D18 WV79, Ireland

T: +353 (1) 2811 122
F: +353 (1) 2811 224
E: sales@clicklitehouse.ie
www.clicklitehouse.ie



Scolmore[®] Dubai



Lake Central Tower,
Office 1803, Business Bay,
Dubai, UAE

UAE Office: +971 4589 6552
F: +971 52 451 1164
E: sales@scolmoredubai.com
www.scolmoredubai.com

